ABBREVIATIONS

@	At
ABV	Above
ACT	Acoustic Ceiling Tile
ADJ	Adjacent
AFF	Above Finished Floor
ALT	Alternate
ALUM	Aluminum
APPROX	Approximately
ARCH	Architect/Architectural
AVG	Average
BD	Board
BLDG	Building
BLKG	Blocking
B.O.	Bottom of
BOS	Bottom of Step
BOT	Bottom
BSMT	Basement
CAB	Cabinet
CF	Cubic Feet
CG	Corner Guard
CIP	Cast In Place
CJ	Control Joint Construction Joint
CL	Center Line
CLG	Ceiling
CLR	Clear
CM	Construction Manager
CMU	Cement Masonry Unit
COL	Column
CONC	Concrete
CONST	Construction
CONT	Continuous
COORD	Coordinate
CPT	Carpet
CT	Ceramic Tile
CTR	Center
D	Deep or Depth
DBL	Double
DEMO	Demolish
DEPT	Department
DET	Detail
DIA	Diameter
DIAG	Diagonal
DIM	Dimension
DN	Down
DWG	Drawing
EA	Each
EJ	Expansion Joint
EL	Elevation
ELEC	Electric or Electrical
ELEV	Elevator
ENG	Engineer
EQ	Equal
EQUIP	Equipment
EXIST	Existing
EW	Equal Width
EXT	Exterior
FA	Fire Alarm
FDN	Foundation
FEC	Fire Extinguisher Cab
FFE	Finished Floor Elevation
FIN	Finish
FLR	Floor
FT	Foot or Feet
FUR	Furred or Furring
FURN	Furnished
GA	Gauge
GALV	Galvanize(d)
GC	General Contractor
GEN	General
GWB	Gypsum Wall Board
GYP	Gypsum
HC	Hollow Core
H/C	Handicap Accessible
HDW	Hardware
HM	Hollow Metal
HOR	Horizontal
HR	Hour
H	Height
HVAC	Heating, Vent. & A/C
IN	Inch
INCL	Included/ing
INFO	Information
INSUL	Insulation
INT	Interior
JC	Janitor's Closet
JST	Joist
JT	Joint
LAM	Laminate
LAV	Lavatory
LBS	Pounds
LF	Linear Feet
LOC	Location
MACH	Machine
MAINT	Maintenance
MAT	Material
MAX	Maximum
MECH	Mechanical
MFR	Manufacturer
MIN	Minimum or Minute
MISC	Miscellaneous
M.O.	Masonry Opening
MTD	Mounted
MTL	Metal
N/A	Not Applicable
N.I.C.	Not in Contract
NOM	Nominal
NO.	Number
NTS	Not to Scale
O.C.	On Center
OD	Outside Diameter
OFCI	Owner Furnished Contractor Installed
OPP	Opposite
OZ	Ounce
PERF	Perforated
PERIM	Perimeter
PH	Partial Height
PLAM	Plastic Laminate
PLUM	Plumbing
PLWD	Plywood
PREFAB	Prefabricated
PSF	Pounds Per Square Foot
PSI	Pounds Per Square Inch
PT	Pressure Treated
PTD	Painted
PVC	Poly Vinyl Chloride
QTY	Quantity
QT	Quarry Tile
R	Radius
RD	Roof Drain, Road
REBAR	Reinforcing Bar
REF	Refrigerator
REINF	Reinforced
REQ'D	Required
REV	Revision
RM	Room
R.O.	Rough Opening
SC	Solid Core
SCHED	Schedule
SEC	Section
SF	Square Feet
SHT	Sheet
SIM	Similar
SPEC	Specification
SS	Stainless Steel
SQ	Square
STC	Sound Transmission Class
STD	Standard
STOR	Storage
STRUCT	Structural
SV	Sheet Vinyl
SYS	System
T&G	Tongue and Groove
TEL	Telephone
THRU	Through
THK	Thick
T.O.S.	Top of Steel
TLT	Toilet
TYP	Typical
U.N.O.	Unless Noted Otherwise
UTIL	Utility
VAR	Variable
VCT	Vinyl Composite Tile
VERT	Vertical
VEST	Vestibule
V.I.F.	Verify in Field
VOL	Volume
VWC	Vinyl Wall Covering
W/	With
W/O	With Out
WC	Water Closet
WD	Wood
WNDW	Window
WF	Wide Flange
WT	Weight
WWF	Welded Wire Fabric

ARCHITECTURAL SYMBOLS



GENERAL NOTES

USE OF CONTRACT DOCUMENTS

1. DRAWINGS AND SPECIFICATIONS OF ALL DISCIPLINES INCLUDED HEREIN CONSTITUTE THE FULL SCOPE OF THIS PROJECT. THESE DOCUMENTS ARE INTENDED TO ESTABLISH THE FULL CONTRACTUAL OBLIGATION OF THE GENERAL CONTRACTOR TO COMPLETE THE WORK SHOWN AND SPECIFIED. IT SHALL BE THE GENERAL CONTRACTOR'S ULTIMATE RESPONSIBILITY TO COORDINATE THE PROPOSALS AND WORK OF ALL TRADES.
2. ARCHITECTURAL AND ENGINEERING DRAWINGS ARE COMPLIMENTARY. ITEMS INDICATED ON ARCHITECTURAL DRAWINGS SHALL BE PROVIDED WHETHER OR NOT THEY ARE INDICATED ON AND/OR COORDINATED WITH CONSULTANTS' DRAWINGS. ANY CONFLICTS BETWEEN ARCHITECTURAL AND ENGINEERING WORK SHALL BE IMMEDIATELY BROUGHT TO THE ATTENTION OF THE ARCHITECT PRIOR TO PROCEEDING WITH THE WORK.
3. CONTRACTORS SHALL COORDINATE THE SCOPE OF THEIR WORK WITH THE CONTRACT DOCUMENTS. PLANS AND SPECIFICATIONS SHALL NOT BE SEPARATED. NO CLAIMS FOR EXTRA WORK WILL BE CONSIDERED DUE TO SUB-CONTRACTOR NOT RELATING SCOPE OF WORK TO CONTRACT DOCUMENTS.
4. ALL WORK IS TO BE IN STRICT COMPLIANCE WITH ALL STATE LAWS AND CODES WHICH APPLY TO THIS USE AND TO GENERALLY ACCEPTED CONSTRUCTION TRADE PRACTICES.
5. THE ARCHITECT WAIVES ANY AND ALL RESPONSIBILITY AND LIABILITY FOR PROBLEMS WHICH ARISE FROM FAILURE TO FOLLOW THESE PLANS, SPECIFICATIONS AND THE DESIGN INTENT THEY CONVEY, OR FOR PROBLEMS WHICH ARISE FROM OTHERS' FAILURE TO OBTAIN AND/OR FOLLOW THE DESIGN PROFESSIONAL'S GUIDANCE WITH RESPECT TO ANY ERRORS, OMISSIONS, INCONSISTENCIES, AMBIGUITIES OR CONFLICTS WHICH ARE ALLEGED.
6. SECTIONS AND DETAILS CONTAINED IN THE CONTRACT DOCUMENTS ARE TYPICAL. CONTRACTOR IS RESPONSIBLE FOR PROVIDING COMPONENTS AND/OR CONSTRUCTION NOTED OR INDICATED IN OTHER SIMILAR AREAS OF THE PROJECT IF THEY CAN BE REASONABLY INFERRED TO BE A PART OF THE ASSEMBLY BASED ON OTHER SIMILAR SECTIONS AND DETAILS CONTAINED IN THE CONTRACT DOCUMENTS.
7. NOT ALL COMPONENTS IN EACH DETAIL MAY BE SPECIFICALLY CALLED OUT ON THAT PARTICULAR ARCHITECTURAL DETAIL. CONTRACTOR SHALL STILL BE RESPONSIBLE FOR PROVIDING THESE ITEMS IF THEY CAN BE REASONABLY INFERRED TO BE A PART OF THE ASSEMBLY BASED ON OTHER SIMILAR DETAILS CONTAINED WITHIN THE CONTRACT DOCUMENTS.
8. DO NOT SCALE ANY DRAWINGS TO DETERMINE DIMENSIONS. RELY ONLY ON FIELD MEASUREMENT AND WRITTEN DIMENSIONS FOR NEW WORK.
9. ALL DIMENSIONS ARE FROM FACE OF STUD OR FACE OF MASONRY (UNO).
10. ALL DIMENSIONS AND CONDITIONS SHALL BE FIELD VERIFIED PRIOR TO PROCEEDING WITH THE WORK OF THIS CONTRACT. ANY DISCREPANCIES BETWEEN FIELD CONDITIONS AND CONTRACT DOCUMENTS SHALL IMMEDIATELY BE BROUGHT TO THE ATTENTION OF THE ARCHITECT PRIOR TO PROCEEDING WITH THE WORK.
11. "SCALE" INDICATED ON THE ELEVATIONS MAY NOT BE REPRESENTATIVE OF A SCALED DRAWING. THE CONTRACTOR SHALL MAKE FIELD MEASUREMENTS AS REQUIRED TO ASCERTAIN THE EXTENT AND QUANTITY OF WORK TO BE PERFORMED.
12. SUBCONTRACTORS SHALL INVESTIGATE ALL EXISTING CONDITIONS ASSOCIATED WITH THEIR SCOPE OF WORK AND VERIFY REQ'D QUANTITIES OF MATERIALS PRIOR TO PROVIDING A BID TO THE GENERAL CONTRACTOR. NO CHANGE ORDERS WILL BE GRANTED FOR ADDITIONAL WORK REQ'D WHICH IS EVIDENT FROM FIELD INVESTIGATION AND IS CONSISTENT WITH THE REQUIREMENTS OF THE CONTRACT DOCUMENTS.
13. SUBCONTRACTORS SHALL VERIFY REQ'D QUANTITIES OF MATERIALS WITH THE GENERAL CONTRACTOR PRIOR TO PURCHASING. NO CHANGE ORDERS WILL BE GRANTED FOR ADDITIONAL QUANTITIES OR DETAIL WORK REQ'D WHICH IS EVIDENT FROM FIELD CONDITIONS AND IS CONSISTENT WITH THE REQUIREMENTS OF THE CONTRACT DOCUMENTS.
14. ANY WORK INSTALLED IN CONFLICT WITH THE CONTRACT DOCUMENTS SHALL BE CORRECTED BY THE CONTRACTOR AT HIS EXPENSE AND AT NO ADDITIONAL EXPENSE TO THE OWNER, ARCHITECT, OR CONSULTANTS.

CONTRACTOR RESPONSIBILITY

1. THE CONTRACTOR SHALL PROVIDE ALL NECESSARY PERMITS AND INSPECTIONS
2. CONTRACTOR AND SUBCONTRACTORS SHALL BE RESPONSIBLE FOR OBTAINING AND PAYING FOR ALL PERMITS AND FEES REQUIRED, NOT NORMALLY COVERED BY THE BUILDING PERMIT.
3. THE CONTRACTOR SHALL FILE ALL NECESSARY CERTIFICATES OF INSURANCE, PAY ALL FEES, AND OBTAIN ANY AND ALL BONDS REQUIRED BY ANY AGENCY IN ORDER TO DO THE WORK HEREIN DESCRIBED.
4. THE CONTRACTOR SHALL VERIFY THE LOCATION OF ALL EXISTING UTILITIES BELOW GRADE AND RELATED SERVICE CONNECTIONS WITH THE RESPECTIVE UTILITY COMPANIES.
5. THE CONTRACTOR SHALL REMOVE FROM THE SITE AND DISPOSE OF ALL TRASH, DEBRIS AND CONSTRUCTION MATERIALS DUE TO CONSTRUCTION OR DEMOLITION PRIOR TO COMPLETION OF THE WORK. THE CONTRACTOR SHALL LEAVE THE SITE IN A CONDITION EQUAL TO OR BETTER THAN IT WAS BEFORE COMMENCEMENT OF WORK ON THIS CONTRACT. THE CONTRACTOR SHALL ALSO ENSURE THAT TRASH AND DEBRIS ARE NOT BLOWN OR SPREAD ON OR OFF SITE DURING THE PERFORMANCE OF THE WORK.
6. THE CONTRACTOR SHALL RESTRICT ACCESS TO THE ROOF TO ONLY THOSE FORCES NEEDING ACCESS TO THE ROOF IN ORDER TO COMPLETE THEIR WORK. FINISHED ROOF SURFACES ARE TO BE PROTECTED AT ALL TIMES.
7. THE CONTRACTOR SHALL LIMIT HIS WORK AND FORCES UNDER HIS CONTROL TO ONLY THOSE AREAS OF WORK AS DEFINED BY THE CONTRACT DOCUMENTS.
8. THE CONTRACTOR SHALL PROVIDE CRAFTSMAN-LIKE INSTALLATION AND FINISH OF ALL EXPOSED CONSTRUCTION SYSTEMS.
9. PAINT ALL EXPOSED SCHEDULED PIPING, CONDUIT AND MECHANICAL EQUIPMENT IN AREAS NOTED TO BE PAINTED.
10. THE CONTRACTOR SHALL REPAIR AT HIS EXPENSE DAMAGE TO ANY FINISHES TO REMAIN WHICH ARE INCURRED DURING WORK ON THIS CONTRACT.
11. THE CONTRACTOR SHALL PROVIDE ADEQUATE WEATHER PROTECTION FOR THE BUILDING AND ITS CONTENTS DURING THE COURSE OF THE WORK. ALL OPENINGS IN ANY WALL OR ROOF SHALL BE PROTECTED FROM ALL FORMS OF WEATHER OR WATER.

FIRE RATED CONSTRUCTION

1. ALL DUCT PENETRATIONS THROUGH PARTITIONS AND CEILINGS SHALL BE PROVIDED WITH NECESSARY FRAMES AND BRACING AROUND THE OPENING.
2. DUCT PENETRATIONS THROUGH FIRE RATED PARTITIONS SHALL BE PROVIDED WITH AUTOMATIC FIRE DAMPERS AS REQUIRED BY CURRENT FIRE CODE AND THE LOCAL AUTHORITY HAVING JURISDICTION.
3. THE CONTRACTOR SHALL PROVIDE A COMPLETE FIRE SAFE BARRIER SEALING ALL AIR SPACES AND OPENINGS IN FIRE PROTECTED WALLS.
4. ALL FIRE AND/OR SMOKE BARRIERS OR WALLS SHALL BE EFFECTIVELY AND PERMENANTLY IDENTIFIED WITH SIGNS OR STENCILING ABOVE A DECORATIVE CEILING AND/OR IN CONCEALED SPACES WITH LETTERS A MINIMUM OF (2) INCHES HIGH ON A CONTRASTING BACKGROUND SPACED A MAXIMUM OF (12) FEET ON CENTER WITH A MINIMUM OF (1) PER WALL OR BARRIER IN ACCORDANCE WITH MODIFICATIONS OF THE 2006 STANDARD FIRE PREVENTION CODE, 120-3-3, CHAPTER 5 OF THE RULES AND REGULATIONS OF THE FIRE SAFETY COMMISSIONER. THE HOURLY RATING SHALL BE INCLUDED ON ALL RATED BARRIERS OR WALLS IN FORMAT: "– – HOUR FIRE AND SMOKE BARRIER. PROTECT ALL OPENINGS."
5. ALL PENETRATIONS THROUGH FIRE RATED SYSTEMS (WALLS, FLOORS, CEILINGS, ETC.) SHALL BE SEALED WITH 3M BRAND FIRE BARRIER CALK CP25WB+NS NO-SAG OR CP25SSL SELF-LEVELING OR EQUAL. DEPTH OF CAULK SHALL BE AS REQUIRED TO ACHIEVE THE REQUIRED FIRE RATING FOR THAT SYSTEM. PROVIDE BACKER ROD AS NECESSARY FOR BACK UP MATERIAL. NOTE BOTH SIDES OF RATED SYSTEMS SHALL BE CAULKED.
6. FIRESTOPPING REQUIREMENT: PENETRATIONS THROUGH RATED WALLS AND FLOORS SHALL BE SEALED WITH A MATERIAL CAPABLE OF PREVENTING THE PASSAGE OF FLAMES AND HOT GASES WHEN SUBJECTED TO THE REQUIREMENTS OF TEST STANDARD SPECIFICS FOR FIRESTOPS, ASTM E814.

NEW CONSTRUCTION

1. ALL WOOD IN CONTACT WITH MASONRY OR CONCRETE SHALL BE PRESSURE TREATED WITH AN APPROVED PRESERVATIVE.
2. ALL INSULATIONS NOTED ON PLANS SHALL BE NONCOMBUSTIBLE AND MAINTAIN THERMAL AND MOISTURE PROTECTION AS NOTED IN THE SPECIFICATIONS.
3. CONTRACTOR SHALL COORDINATE THE INSTALLATION OF THE VARIOUS TRADE ITEMS WITHIN THE SPACE ABOVE ALL CEILINGS (INCLUDING, BUT NOT LIMITED TO: STRUCTURAL MEMBERS, MECHANICAL DUCTS AND INSULATION, CONDUITS, RACEWAYS, SPRINKLER SYSTEM, LIGHT FIXTURES, CEILING SYSTEMS, AND ANY SPECIAL STRUCTURAL SUPPORTS REQUIRED) AND SHALL BE RESPONSIBLE FOR MAINTAINING THE FINISH CEILING HEIGHT ABOVE THE FINISH FLOOR INDICATED IN THE DRAWINGS AND THE FINISH SCHEDULE. (CEILING HEIGHT DIMENSIONS ARE TO THE FINISH SURFACE OF CEILING.) CONTRACTOR SHALL NOTIFY ARCHITECT IN WRITING OF ANY CONFLICTS PRIOR TO PROCEEDING WITH THE WORK.
4. ACCESS PANELS SHALL BE PROVIDED AND INSTALLED WHEREVER REQUIRED BY BUILDING CODE OR FOR THE PROPER OPERATION OR MAINTENANCE OF MECHANICAL OR ELECTRICAL EQUIPMENT, WHETHER OR NOT INDICATED ON THE DRAWINGS. CONTRACTOR SHALL COORDINATE SIZE, LOCATION, AND TYPE OF ACCESS PANEL WITH OTHER CONTRACTORS' WORK AND RECEIVE APPROVAL OF THE ARCHITECT. ACCESS PANEL SHALL BE AS SPECIFIED. NO ACCESS PANEL SHALL BE LOCATED, FRAMED OR INSTALLED WITHOUT THE EXPRESSED APPROVAL OF THE ARCHITECT.
5. ALL DUCT PENETRATIONS THROUGH PARTITIONS AND CEILINGS SHALL BE PROVIDED WITH NECESSARY FRAMES AND BRACING AROUND THE OPENING AND SHALL BE PROVIDED WITH AUTOMATIC FIRE DAMPERS AS REQUIRED BY THE BUILDING DEPARTMENT FOR FIRE-RATED PENETRATIONS.
6. HORIZONTAL JOINT REINFORCEMENT IS GENERALLY NOT SHOWN FOR REASONS OF CLARITY. TIES AND ANCHORS SPECIFICALLY NOTED ON DETAILS ARE IN ADDITION TO HORIZONTAL JOINT REINFORCEMENT UNLESS SPECIFICALLY NOTED OTHERWISE.
7. SIZE OF MECHANICAL AND ELECTRICAL EQUIPMENT PADS AND BASES ARE APPROXIMATE ONLY. CONTRACTOR SHALL VERIFY DIMENSIONS WITH RESPECTIVE EQUIPMENT MANUFACTURER.
8. CONTRACTOR SHALL PROVIDE AND INSTALL ALL STIFFENERS, BRACING, BACK-UP PLATES, BLOCKING, AND SUPPORTING BRACKETS REQUIRED FOR THE INSTALLATION OF ALL CASEWORK, TOILET ACCESSORIES AND ALL FLOOR-MOUNTED OR SUSPENDED MECHANICAL AND ELECTRICAL EQUIPMENT.
9. ALL DISSIMILAR METALLIC MATERIALS SHALL BE EFFECTIVELY ISOLATED FROM EACH OTHER TO PREVENT GALVANIC ACTION.
10. FILLED CMU CELLS ON ARCHITECTURAL DRAWINGS ARE IN ADDITION TO THOSE SHOWN ON STRUCTURAL DRAWINGS AND SHALL BE REINFORCED AS INDICATED THEREIN.

SITE WORK

1. SOD, LANDSCAPING, SIDEWALKS, CURBS OR ANY OTHER SITE APPURTENANCES DAMAGED DURING DEMOLITION OR CONSTRUCTION SHALL BE REPLACED OR REPAIRED TO PRE-CONSTRUCTION CONDITIONS AT THE CONTRACTOR'S EXPENSE PRIOR TO COMPLETION OF THIS PROJECT.
2. WHERE CONC. WALKWAYS ABUT EXTERIOR MASONRY WALLS, CONTRACTOR SHALL ADJUST THE HEIGHT OF WEEPS AND BASE FLASHING AS NECESSARY TO PROVIDE CAVITY DRAINAGE ABOVE ADJACENT SURFACES. TYP.

LIST OF DEDUCTIVE ALTERNATES:

ALTERNATE 1:

IN LIEU OF FOUR-FOLD FIRE STATION DOORS ON THE FRONT OF THE BUILDING, INSTALL OVERHEAD HI LIFT DOORS IN ALTERNATE SPECIFICATION, PROVIDE BOLLARDS ON INTERIOR.

ALTERNATE 2:

CREDIT FOR TWO 10'-0" DIAMETER "ESSENCE" HIGH VELOCITY FANS. PROVIDE ALL WIRING, CIRCUITRY AND SWITCH PLATES, ETC. FOR FUTURE INSTALLATION OF TWO FANS.

ALTERNATE 3:

CREDIT FOR MATERIAL AND INSTALLATION OF WARDROBE LOCKERS WITHIN EACH DORM ROOM (18 TOTAL)

ALTERNATE 4:

CREDIT FOR EQUIPMENT - GEAR EXTRACTOR - PROVIDE ALL WIRING, CIRCUITRY, ETC. FOR FUTURE INSTALLATION OF SPECIFIED EXTRACTOR

WALL TYPES

WALL TYPE GENERAL NOTES

1. WALL TYPES ARE GENERIC IN NATURE AND DO NOT SHOW EVERY POSSIBLE CONFIGURATION OR CONDITION. REFER TO PLANS, ELEVATIONS, SECTIONS, AND DETAILS FOR SPECIFIC DESIGN INFORMATION AND ELEMENTS WHICH MAY ALTER INFORMATION CONTAINED IN WALL TYPES.
2. NEW EXTERIOR WALLS ARE DETAILED IN BUILDING AND WALL SECTIONS.
3. SEE STRUCTURAL PLANS FOR ADDITIONAL FRAMING INFORMATION AND REINFORCING.
4. COORDINATE SEALING OF PENETRATIONS AT RATED WALLS WITH MEP DRAWINGS AND SPECIFICATIONS.
5. REFER TO NOTED UL ASSEMBLY FOR ADDITIONAL CONSTRUCTION INFORMATION.
6. ALL FIRE WALLS, SMOKE WALLS, AND WALLS REQUIRED TO HAVE PROTECTED OPENINGS OR PENETRATIONS ARE TO BE PERMANENTLY STENCIL LABELED ACCORDING TO FIRE CODE REQUIREMENTS IN ACCESSIBLE CONCEALED FLOOR, CEILING OR ATTIC SPACES.
7. REFER TO LIFE SAFETY PLANS FOR CONTINUITY OF ALL RATED PARTITIONS.

WALL TAG LEGEND



SEE WALL TYPE DETAILS FOR WALL ASSEMBLIES USED IN THIS PROJECT AND ADDITIONAL INFORMATION.

WALL TYPE NOMINAL SIZING

# - NOMINAL CORE SIZE	CORE COMPOSITION				
	METAL STUD	WOOD STUD	CMU	BRICK	CONCRETE
	M	W	U	B	C
1	(HAT CHANNEL)	1x (FURRING STRIPS)	-	-	-
2	1 5/8"	2x2	-	-	-
3	2 1/2"	2x3	-	-	-
4	3 5/8"	2x4	4"	1 WYTHE	4"
6	6"	2x6	6"	-	6"
8	8"	2x8	8"	2 WYTHE	8"
10	10"	2x10	10"	-	10"
12	12"	2x12	12"	3 WYTHE	12"

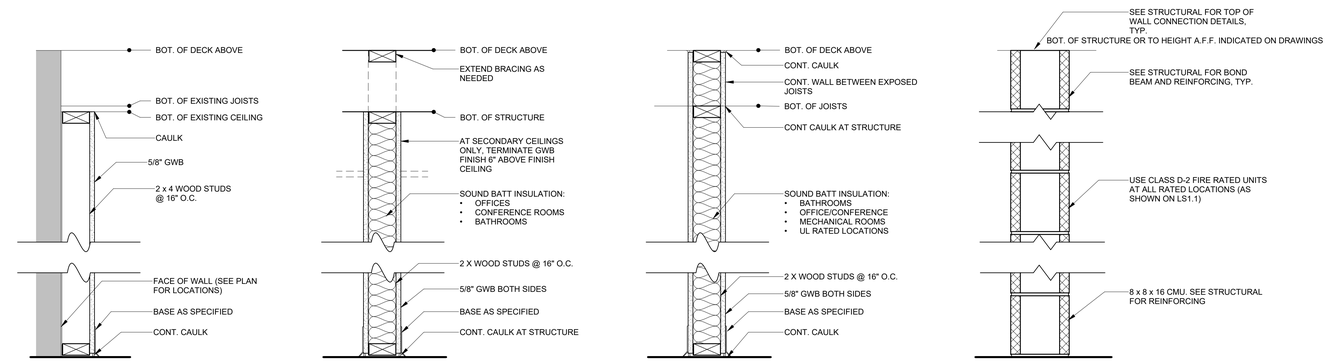

2WR ARCHITECTS
11 Ninth Street, Suite 120
Columbus, GA 31901
P. (706) 571-6923

STATE OF GEORGIA
EMILY ALBRIGHT FLOURNOY
CERTIFICATE NO. RA_____
REGISTERED ARCHITECT
08/31/2026

RFP 2027-3500-01

FIRE STATION MADISON, GA
1100 MARY MAGNAN BLVD
MADISON, GA 30650
BID DOCUMENTS

Project No.:	25-02527
Date:	08/31/26
Drawn by:	EE
Checked by:	WAG
Revisions:	

No.	Date	Description

GENERAL NOTES & LEGENDS

T1.2

FILE PATH: Autodesk Docs://26-02527 Madison GA Fire Station/25-02527 Madison GA Fire Station V25.rvt
PRINTED: 8/31/2026 3:44:45 PM