


- STRUCTURAL DEMOLITION KEY NOTES**
- ① - REMOVE EXISTING "TECTUM" DECK, METAL DECK OVERLAY, TRIM, AND SUB-FRAMING LEAVING ONLY THE MAIN WIDE-FLANGE COLUMN/BEAM FRAMES. CLEAN AND PAINT PER ARCHITECTURAL DRAWINGS.
 - ② - CUT IN NEW WINDOW OPENING. SEE DETAIL 5/S300 FOR ADDITIONAL SEQUENCING AND DETAIL INFORMATION.
 - ③ - CUT IN NEW DOOR OPENING. SEE DETAIL 5/S300 FOR ADDITIONAL SEQUENCING AND DETAIL INFORMATION.
 - ④ - REMOVE ENTIRE WALL THIS SECTION.
 - ⑤ - REMOVE SEGMENT OF WALL TO ENLARGE EXISTING OPENING FOR NEW DOOR LOCATION. SEE DETAIL 5/S300 FOR ADDITIONAL SEQUENCING AND DETAIL INFORMATION.

1 STRUCTURAL DEMOLITION PLAN
 S200 SCALE: 1/4" = 1'-0"

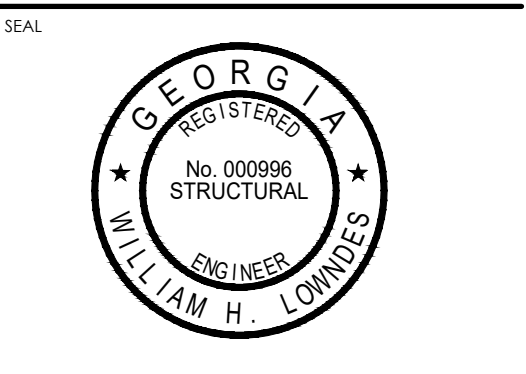

IF SEALED, DO NOT COPY

COLLINS P. LEE MEMORIAL LIBRARY
 237 HARRISBURG ROAD SW, MILLEDGEVILLE, GA 31061

COPYRIGHT © 2018 CAS ARCHITECTURE, P.C. ALL RIGHTS RESERVED. THIS DOCUMENT AND ANY REPRODUCTIONS, IN WHOLE OR IN PART, ARE INSTRUMENTS OF SERVICE AND ARE THE SOLE PROPERTY AND COPYRIGHT OF CAS ARCHITECTURE, P.C. AND MAY NOT BE REPRODUCED, PUBLISHED, USED OR COPIED IN ANY MANNER WITHOUT WRITTEN PERMISSION FROM ANY DUE COMPENSATION TO CAS ARCHITECTURE, P.C. THESE DOCUMENTS HAVE BEEN PREPARED SPECIFICALLY FOR THIS PROJECT. THEY ARE NOT SUITABLE FOR USE ON OTHER PROJECTS OR IN OTHER LOCATIONS.

THIS DOCUMENT WAS CREATED ELECTRONICALLY. THIS MEDIA SHOULD NOT BE CONSIDERED A CRIBBED DOCUMENT UNLESS IT HAS BEEN PROPERLY SEALED AND ORIGINALLY SIGNED BY A REGISTERED ARCHITECT OF GA ARCHITECTURE, P.C.

THESE PLANS ARE COMPLEMENTARY THEREFORE THE CONTRACTOR SHALL SEE THE ARCHITECTURAL, STRUCTURAL, MECHANICAL, PLUMBING, AND ELECTRICAL PLANS AND SPECIFICATIONS, WHICH IF REQUIRED BY ANY ONE SHALL BE BINDING AS REQUIRED BY ALL. THE INTENTION OF THE DOCUMENT IS TO INCLUDE ALL LABOR, MATERIALS, EQUIPMENT AND OTHER ITEMS NECESSARY FOR THE PROPER EXECUTION AND COMPLETION OF THE WORK. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE COORDINATION OF THE WORK OF ALL TRADES.

NO.	DATE	ISSUANCE / REVISIONS