CSC.2024.01.007

DOOR SCHEDULE

REV. #	Mark	ROOM	DOOR SIZE W	DOOR SIZE H	DOOR T	DOOR TYPE	DOOR MAT.	DOOR GLZ.	FRAME TYPE	FRAME MAT.	DETAIL HEAD	DETAIL JAMB	DETAIL SILL	HARDWARE SET	NOTES
LEVEL 01															
	101	RECEPTION	3'-0"	7'-0"	1"	GS	AL/GL	GL-01	SF-01	HM	H7	J7		SET 6	STOREFRONT DOOR
	103	HALLWAY	3'-0"	7'-0"	1 3/4"	F	HM	N/A	HM	HM	H1	J1		SET 2	
	104	OFFICE	3'-0"	7'-0"	1 3/4"	N	SCWD	N/A	HM	HM	H2	J2		SET 5	
	105	OFFICE	3'-0"	7'-0"	1 3/4"	N	SCWD	N/A	HM	HM	H2	J2		SET 5	
	106	OFFICE	3'-0"	7'-0"	1 3/4"	N	SCWD	N/A	HM	HM	H2	J2		SET 5	
	107A	CLOSET	3'-0"	7'-0"	1 3/4"	F	SCWD	N/A	HM	HM	H2	J2		SET 4	
	107B	CLOSET	3'-0"	7'-0"	1 3/4"	F	SCWD	N/A	HM	HM	H2	J2		SET 4	
	108	DISPATCH	3'-0"	7'-0"	1 3/4"	N	SCWD	N/A	HM	HM	H2	J2		SET 5	
	109	BREAK ROOM	3'-0"	7'-0"			-			HM	-	-		(none)	CASED OPENING
	110	RR	3'-0"	7'-0"	1 3/4"	F	HM	N/A	HM	HM	H2	J2		SET 3	
	111	RR	3'-0"	7'-0"	1 3/4"	F	HM	N/A	HM	HM	H2	J2		SET 3	
	112	RR	3'-0"	7'-0"	1 3/4"	F	HM	N/A	HM	HM	H2	J2		SET 3	
	113A	NON-HEATED WAREHOUSE	3'-0"	7'-0"	1 3/4"	F	HM	N/A	HMM	HM	H1	J1		SET 1	
	113B	NON-HEATED WAREHOUSE	3'-0"	7'-0"	1 3/4"	F	HM	N/A	HMM	HM	H1	J1		SET 1	
	113C	NON-HEATED WAREHOUSE	3'-0"	7'-0"	1 3/4"	F	HM	N/A	HMM	HM	H1	J1		SET 1	
	114A	HEATED WAREHOUSE	3'-0"	7'-0"	1 3/4"	F	HM	N/A	HMM	HM	H1	J1		SET 1	
	114B	HEATED WAREHOUSE	3'-0"	7'-0"	1 3/4"	F	HM	N/A	HMM	HM	H1	J1		SET 1	
	114C	HEATED WAREHOUSE	3'-0"	7'-0"	1 3/4"	F	HM	N/A	HM	HM	H3	J3		SET 2	
	OVHD 1	HEATED WAREHOUSE	12'-0"	14'-0"	1 1/2"	S	-		OHS	-	H4	J4		SET 7	MOTOR OPERATED DOOR
	OVHD 2	HEATED WAREHOUSE	14'-0"	14'-0"	1 1/2"	S	-		OHS	-	H4	J4		SET 7	MOTOR OPERATED DOOR
	OVHD 3	NON-HEATED WAREHOUSE	12'-0"	14'-0"	3/4"	C	-	N/A	OHC	-	H5	J5		SET 7	MOTOR OPERATED DOOR

HCW - HOLLOW-CORE WOOD
SCW - SOLID-CORE WOOD
HM - HOLLOW-METAL
FG - FIBERGLASS

PTD - PAINTED
PRF - PRE-FINISHED

HARDWARE SCHEDULE

REV. #	HARDWARE SET	OPERATION HARDWARE	PASSAGE SET HANDLES	PANIC HARDWARE	ENTRY / LOCKSET	CYLINDER	DOOR CLOSER	DOOR STOPPER	WEATHER STRIPPING	ADA THRESHOLD	SILENCERS	PEEP HOLE	KICK PLATE	COMMENTS
	SET 1	CONTINUOUS HINGE, RIM CYLINDER, CLOSER	LEAVER HANDLE, PANIC BAR	■	■		■		■	■	■		■	
	SET 2	CONTINUOUS HINGE, RIM CYLINDER, CLOSER	LEAVER HANDLE		■		■		■	■	■		■	
	SET 3	3 HINGE, WALL STOP, PRIVACY LOCK	LEVER HANDLE					■						
	SET 4	3 HINGE, STOREROOM LOCK	LEVER HANDLE								■			
	SET 5	3 HINGE, WALL STOP, OFFICE LOCK	LEVER HANDLE					■			■			
	SET 6	STOREFRONT DOOR HARDWARE	PROVIDED BY SUPPLIER			■								BALANCE OF HARDWARE PROVIDED BY STOREFRONT SUPPLIER
	SET 7	OVERHEAD DOOR	PROVIDED BY MANUFACTURER											ALL HARDWARE BY OVERHEAD DOOR MANUFACTURER

FRAME TYPES

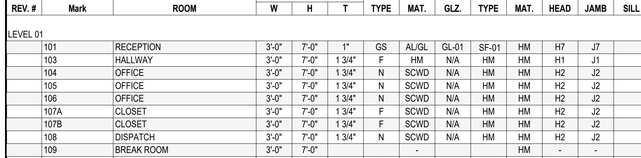

FRAME TYPE HM
HOLLOW METAL



FRAME TYPE OHC
OVERHEAD COILING
(BY MANUFACTURER)



FRAME TYPE OHS
OVERHEAD SECTIONAL
(BY MANUFACTURER)

DOOR TYPES



DOOR TYPE N
FLUSH WITH NARROW LITE



DOOR TYPE F
FLUSH



DOOR TYPE GS
FULL GLASS WITH STYLE

DOOR TYPE C
COILING
(BY MANUFACTURER)

DOOR TYPE S
SECTIONAL
(INSULATED SECTIONAL DOOR
B.O.D. OVERHEAD DOOR COMPANY
STEEL DOOR MODEL 418)

STOREFRONT ELEVATIONS

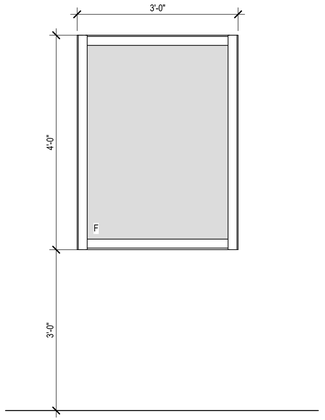

2 SF-02
A-801 | 3/4" = 1'-0"

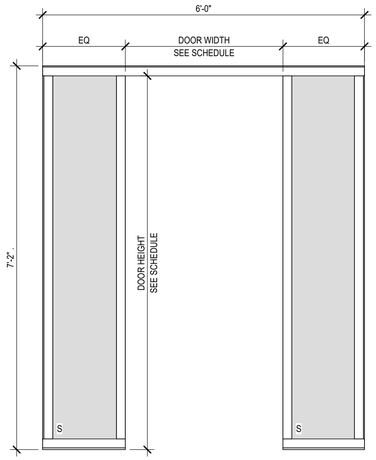

1 SF-01
A-801 | 3/4" = 1'-0"

DOOR AND FRAME GENERAL NOTES

1. UNDERCUT THE BOTTOMS OF DOORS TO CLEAR THE TOP OF FINISHED FLOOR, BY 1/2" MAXIMUM, U.N.O. VERIFY SLAB CONDITIONS AND TRIM EACH DOOR TO FIT CONDITION. WHERE RADICAL VARIATIONS IN FLOOR LEVEL EXIST, DOORS SHALL BE ORDERED WITH BOTTOM STILE SIZED TO ACCOMMODATE THESE UNDERCUT CONDITIONS.
2. CAULK THE JOINT BETWEEN THE FRAME AND WALL, ALL SIDES, WITH PAINTABLE WHITE LATEX CAULK.
3. CONTRACTOR SHALL REVIEW KEYING WITH OWNER PRIOR TO FITTING CYLINDERS. KEY CYLINDERS TO OWNER'S MASTER.
4. ALL NEW DOOR HARDWARE IS TO MATCH THE EXISTING MANUFACTURER, STYLE, AND FINISH. CONTRACTOR IS TO FIELD VERIFY THE EXISTING HARDWARE.
5. DOOR PANELS SHOWN FOR COORDINATION PURPOSES ONLY. COORDINATE FINAL PANEL DESIGN WITH INTERIOR DESIGN SCOPE.
6. LETTER 'T' ON GLAZING INDICATES LOCATION OF SAFETY GLAZING, SEE SCHEDULE FOR LOCATION. SAFETY GLASS TO COMPLY WITH IBC SECTION 2406.
7. ALL GLAZING IN EXTERIOR DOORS TO BE LOW-E CLEAR GLAZING.
8. ALL EXTERIOR DOORS SHALL BE INSULATED.
9. COORDINATE WITH MECHANICAL REQUIREMENTS FOR REQUIRED UNDERCUT IF ANY.

STOREFRONT GENERAL NOTES

1. LETTER 'S' ON GLAZING INDICATES LOCATION OF SAFETY GLAZING, SEE SCHEDULE FOR LOCATION. SAFETY GLASS TO COMPLY WITH IBC SECTIONS 2406 & 2407.
2. LETTER 'F' ON SASHES INDICATES THAT IT IS FIXED.
3. ALL GLAZING IN EXTERIOR WINDOWS TO BE SOLARBAN 70 WITH SOLARBRONZE TINT MIN SHGC 0.25

CSC DESIGN, INC.
ARCHITECTS & ENGINEERS
135 P RICKMAN INDUSTRIAL DR.
SUITE 100 CANTON, GA 30115
Phone: (770) 345-2579

© 2020, CSC Design. These drawings are protected by the copyright laws of the United States. These drawings or any part thereof may not be used for any purpose or reproduced in any form or by any means without the written consent of CSC Design.

STATE OF GEORGIA
KEVIN B. WHIPPLE
04/27/2026
CERTIFICATE NO. RA014566
REGISTERED ARCHITECT

PROJECT NUMBER: 25-040

REVISIONS
NO. DATE: ISSUE:

DRYWALL WAREHOUSE HWY 81
267 HIGHWAY 81
OXFORD, GA 30054
WALTON COUNTY, GEORGIA

DOOR SCHEDULE

A-801

ISSUED FOR CONSTRUCTION

Y:\Projects\25-040 Drywall Warehouse_Oxford, GA\Archi\00 REVIT\Drywall Warehouse.rvt

4/27/2026 1:45:06 PM