

FINISH SCHEDULE

| | | | | | | | | | |
|----------------|-----------------------|--------|-----------------------------------|--------|------------------------|------|------------------------|------|------------------------|
| ABBREVIATIONS: | | ACP | ACOUSTICAL CEILING PANELS | EPT | ENAMEL PAINT | MAR | MARBLE | SS | SOLID SURFACE MATERIAL |
| CB | CERAMIC BASE | EHP | EXTERIOR HIGH PERFORMANCE COATING | N/A | NOT APPLICABLE(NONE) | STN | STONE | STN | STONE |
| CFT | CERAMIC FLOOR TILE | EPT | EXTERIOR PAINT SYSTEM | PC | POLISHED CONCRETE | TRZ | TERRAZZO | TRZ | TERRAZZO |
| CWT | CERAMIC WALL TILE | ES | EXPOSED STRUCTURE | PLAS. | PLASTER | U | UNFINISHED | U | UNFINISHED |
| CMU | CONCRETE MASONRY UNIT | FF | FACTORY FINISH | PT. | PAINT | UND. | UNDERLAYMENT BOARD | UND. | UNDERLAYMENT BOARD |
| CPT | CARPET | GBB | GYPSUM BACKING BOARD | PLYWD. | PLYWOOD | VRN | VARNISH | VRN | VARNISH |
| CPT-T | CARPET TILE | GFP | GLASS FIBER PANEL | QT | QUARRY TILE | VCT | VINYL COMPOSITION TILE | VCT | VINYL COMPOSITION TILE |
| CS | CONC. SEALER | GYP. | GYPSUM BOARD | RB | RUBBER BASE | VS | VINYL SHEET FLOORING | VS | VINYL SHEET FLOORING |
| CONC. | CONCRETE | GYP. X | GYPSUM BOARD, TYPE "X" | RCP | REFLECTED CEILING PLAN | WC | WALL COVERING | WC | WALL COVERING |
| CPNL | COOLER PANEL | HPC | HIGH PERFORMANCE COATING | SHTG | SHEATHING | WD. | WOOD | WD. | WOOD |
| | | IHP | INTERIOR HIGH PERFORMANCE COATING | SLT | SLATE | WP | WOOD PANEL | WP | WOOD PANEL |
| | | IPT | INTERIOR PAINT SYSTEM | S | STAIN | | | | |

NOTE: AN ABBREVIATION PRECEDED WITH AN "E" INDICATES AN EXISTING CONDITION, MATERIAL, FINISH, ETC.

| RM. NO. | SPACE | FLOOR | | BASE | | | WAINSCOT | | | | WALLS | | | | CEILING | | | | REMARKS | | | | | |
|---------|--------------|-------|-----|-------|-----|------|----------|-----|------|-------|-------|------|-------|------|---------|-------|------|--------|---------|-----------|-------|--------|-----|--|
| | | MAT'L | FIN | MAT'L | FIN | TYPE | MAT'L | FIN | TYPE | C. R. | NORTH | EAST | SOUTH | WEST | D/W. | MAT'L | FIN | HEIGHT | | CORN TYPE | | | | |
| 101 | ENTRY | CONC | PC | RB | - | - | - | - | - | - | GYPX | PT | N/A | N/A | GYPX | PT | GYPX | PT | FF | ES | PT | VARIES | N/A | |
| 102 | PASSAGE | CONC | PC | RB | - | - | - | - | - | - | GYPX | PT | GYPX | PT | GYPX | PT | GYPX | PT | FF/PT | ACP | FF | 9'-0" | - | |
| 103 | MEN | CONC | CFT | CB | FF | - | - | - | - | - | GBB | CWT | GBB | CWT | GBB | CWT | GBB | CWT | PT | ACP | FF | 11'-4" | - | |
| 104 | WOMEN | CONC | CFT | CB | FF | - | - | - | - | - | GBB | CWT | GBB | CWT | GBB | CWT | GBB | CWT | PT | ACP | FF | 9'-0" | - | |
| 105 | GAME RM | CONC | PC | RB | - | - | - | - | - | - | GYPX | PT | GYPX | PT | GYPX | PT | GYPX | PT | PT | ACP | PT | 9'-0" | - | |
| 106 | CLERK AREA | CONC | PC | RB | - | - | - | - | - | - | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | PT | ACP/GYPX | FF/PT | 9'-0" | N/A | |
| 107 | UNISEX | CONC | CFT | CB | FF | - | - | - | - | - | GYPX | PT | GYPX | PT | GYPX | PT | GYPX | PT | PT | ACP | FF | 8'-0" | - | |
| 108 | OFFICE | CONC | CPT | RB | - | - | - | - | - | - | GYPX | PT | GYPX | PT | GYPX | PT | GYPX | PT | FF/PT | ACP | FF | 9'-0" | - | |
| 109 | PASSAGE | CONC | PC | RB | - | - | - | - | - | - | GYPX | PT | GYPX | PT | GYPX | PT | GYPX | PT | FF/PT | ES | PT | VARIES | - | |
| 110 | FOOD PREP | CONC | PC | RB | - | - | - | - | - | - | GYPX | GFP | GYPX | GFP | GYPX | GFP | GYPX | GFP | FF/PT | ACP | FF | 9'-0" | - | |
| 111 | PASSAGE | CONC | CS | RB | - | - | - | - | - | - | GYPX | PT | N/A | N/A | GYPX | PT | GYPX | PT | PT | ACP | FF | 9'-0" | - | |
| 112 | ELECTRICAL | CONC | CS | RB | - | - | - | - | - | - | GYPX | PT | GYPX | PT | GYPX | PT | GYPX | PT | PT | ACP | FF | 9'-0" | - | |
| 113 | REFRESHMENTS | CONC | PC | RB | N/A | N/A | N/A | N/A | N/A | N/A | GYPX | PT | N/A | N/A | GYPX | PT | N/A | N/A | PT | ES | PT | VARIES | N/A | |
| 114 | COOLER AREA | CPNL | FF | - | - | - | - | - | - | - | CPNL | FF | CPNL | FF | CPNL | FF | CPNL | FF | FF | CPNL | FF | 8'-0" | - | |
| 115 | BEER CAVE | CPNL | FF | - | - | - | - | - | - | - | CPNL | FF | CPNL | FF | CPNL | FF | CPNL | FF | FF | CPNL | FF | 8'-0" | - | |
| 116 | COOLER AREA | CPNL | FF | - | - | - | - | - | - | - | CPNL | FF | CPNL | FF | CPNL | FF | CPNL | FF | FF | CPNL | FF | 8'-0" | - | |
| 117 | SALES AREA | CONC | PC | CB/RB | N/A | N/A | N/A | N/A | N/A | N/A | GBB | CWT | GBB | CWT | GYPX | PT | N/A | N/A | FF/PT | ES | PT | VARIES | N/A | |


FINISH NOTES:

1. PROPER PREPARATION OF SURFACES AND ADEQUATE CLEANING FOR BONDING OF PAINT IS AN ABSOLUTE NECESSITY. START OF PAINTING INSTALLATION AND OPERATIONS INDICATES ACCEPTANCE OF SUBSTRATE SURFACE CONDITIONS AND FULL RESPONSIBILITY FOR COMPLETED WORK.
2. COORDINATE EXACT LOCATION OF CEILING LIGHTS, CEILING SUPPLY AND RETURN WITH MECHANICAL AND ELECTRICAL SUB-CONTRACTORS' LAYOUT.
3. WHERE DIFFERENT FLOOR FINISHES MEET, PROVIDE & INSTALL VINYL TRANSITION, UNLESS OTHERWISE NOTED.
4. ALL INTERIOR WALL FINISHES SHALL MEET NFPA 101 FLAME-SPREAD 0-25.

GM

Architect

102 Sammy Court
WARNER ROBINS, GEORGIA 31088
gmarch@outlook.com
(478)-365-8976

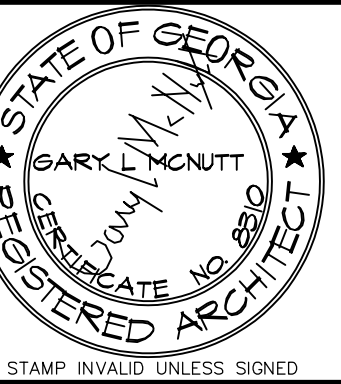

ARCHITECT

CONSULTANT

STAMP INVALID UNLESS SIGNED

FINISH FLOOR PLAN & FINISH SCHEDULE

New Facility

Hampton Travel Center

Hwy 81 / Parcel # 019-02031002 Hampton, Georgia 30253

| | |
|--------------|------------|
| JOB NO.: | 02511 |
| DRAWN BY: | GM |
| CHECKED BY: | GM |
| DESCRIPTION: | SCH-REVIEW |
| DATE: | 00.00.25 |
| DESCRIPTION: | DD-REVIEW |
| DATE: | 00.00.25 |
| DESCRIPTION: | CD-REVIEW |
| DATE: | 01.12.26 |
| DESCRIPTION: | BID-CONST |
| DATE: | 00.00.26 |
| REVISIONS: | |
| 1 | 03.13.26 |
| 2 | |
| 3 | |
| 4 | |
| 5 | |
| 6 | |
| 7 | |

THESE DRAWINGS ARE THE PROPERTY OF GMARCHITECT AND ARE NOT TO BE REPRODUCED OR REUSED WITHOUT PERMISSION AND CREDIT.
COPYRIGHT © 2025

SHEET

A9.1.1

OF

PROJECT NORTH
 FLOOR PLAN
SCALE: 3/16" = 1'-0"

