

FINISH SCHEDULE						
ROOM DATA		BASE FINISH	WALL FINISHES			
NUMBER	NAME		NORTH	EAST	SOUTH	WEST
101	LOBBY	RB	GWB-STONE	GWB-GLASS	GWB	GWB
102	TOILET	CT	GWB-CT	GWB-CT	GWB-CT	GWB-CT
103	VESTIBULE	RB	GWB	GWB	GWB	GWB
104	TOILET	CT	GWB-CT	GWB-CT	GWB-CT	GWB-CT
105	TOILET	CT	GWB-CT	GWB-CT	GWB-CT	GWB-CT
106	CUST	CT	GWB-CT	GWB	GWB	GWB-CT
107	DATA	RB	GWB	GWB	GWB	GWB
108	TRAINING ROOM	RB	GWB	GWB	GWB	GWB
108.1	CAFE	RB	GWB-CT	GWB	GWB	GWB
109	MECH./ELEC.	RB	GWB	GWB	GWB	GWB
110	STORAGE	RB	GWB	GWB	GWB	GWB
111	STORAGE	RB	GWB	GWB	GWB	GWB
112	OFFICES	RB	GWB	GWB	GWB	GWB
112	WORK STATIONS 9-14	RB	GWB	GWB	GWB	GWB
113	STORAGE	RB	GWB	GWB	GWB	GWB
114	STAFF VEST.	RB	GWB	GWB	GWB	GWB-GLASS
115	OFFICES	RB	GWB	GWB	GWB	GWB
115a	WORK STATIONS 1-4	RB	GWB	GWB	GWB	GWB
115b	WORK STATIONS 5-8	RB	GWB	GWB	GWB	GWB
115c	ADMIN. ASST.	RB	GWB	GWB	GWB	GWB
116	RECEPTION	RB	GWB	GWB	GWB	GWB
117	LT.	RB	GWB	GWB	GWB	GWB
118	LT.	RB	GWB	GWB	GWB	GWB
119	LT.	RB	GWB	GWB	GWB	GWB
120	CONFERENCE	RB	GWB	GWB	GWB	GWB
121	CAPTAIN	RB	GWB	GWB	GWB	GWB
122	CHIEF	RB	GWB	GWB	GWB	GWB
123	RECORDS	RB	GWB	CMU-PT	CMU-PT	GWB
124	EVIDENCE	RB	CMU-PT	CMU-PT	CMU-PT	GWB
125	TOILET	CT	GWB-CT	GWB-CT	GWB-CT	GWB-CT
126	TOILET	CT	GWB-CT	GWB-CT	GWB-CT	GWB-CT
127	VAULT	RB	CMU-PT	CMU-PT	CMU-PT	GWB
128	Q. M.	RB	GWB	GWB	GWB	GWB
129	INTERVIEW	RB	GWB	GWB	GWB	GWB
130	INVESTIGATE	RB	GWB	GWB	GWB	GWB
130.1	CAMERA	RB	GWB	GWB	GWB	GWB

GENERAL FLOOR FINISH NOTES

- ALL FINISH MATERIALS SHALL MEET THE FLAME SPREAD RATINGS PER THE BUILDING CODE.
- REFER TO INTERIOR ELEVATIONS FOR SPECIFIC MATERIAL LOCATIONS.
- PROVIDE TRANSITION STRIPS AT ALL LOCATIONS WHERE CONDITIONS OF DISSIMILAR FLOOR FINISHES JOIN. REFER TO SPECIFICATIONS FOR TRANSITION TYPES.
- ALL FLOORING TRANSITIONS AT DOORS SHALL BE LOCATED UNDER THE DOOR AND OCCUR AT THE CENTERLINE OF DOORS IN THE CLOSED POSITION, U.N.O.
- CONTRACTOR WILL BE RESPONSIBLE FOR PROTECTING FINISHED FLOORING SURFACES FROM DAMAGE DURING ALL CONSTRUCTION PHASES.
- GENERAL CONTRACTOR TO SUBMIT FLOORING PATTERN LAYOUT WITH STRIPING COLORS AND STRIPING WIDTH AND NOTIFY ARCHITECT. CONTRACTOR SHALL NOT PROCEED WITH THE FLOORING INSTALLATION UNTIL LAYOUT IS APPROVED BY ARCHITECT.
- ALL SCHEDULED DIRECTIONS (NORTH, EAST, SOUTH, WEST) ARE PER PLAN DIRECTIONS, NOT TRUE COMPASS DIRECTIONS.
- PROVIDE AND INSTALL BULLNOSE TRIM AT ALL TRANSITIONS FROM CERAMIC WALL TILE TO OTHER MATERIALS U.N.O.

FINISH SCHEDULE NOTES AND REMARKS

GENERAL NOTES:


ALL SCHEDULED DIRECTIONS (NORTH, EAST, SOUTH, WEST) ARE PER SHEET NORTH ARROW.

PROTECT ALL FINISHED FLOORING SURFACES FROM DAMAGE DURING ALL CONSTRUCTION PHASES.

BASE:
RB - RUBBER BASE
CT - CERAMIC TILE COVE BASE

WALL:
CMU - CONCRETE MASONRY UNIT - TO BE PAINTED
GWB - GYPSUM WALL BOARD TO BE PAINTED
CT - WALL CERAMIC TILE - SEE SHEET A-401

FLOOR FINISH LEGEND



SC
STAINED CONCRETE



PCT
PORCELAIN CERAMIC TILE
FLOORING



CMT
COMPOSITE MODULAR TEXTILE



LVT
LUXURY VINYL TILE


NOTE: PATTERNS ARE FOR REPRESENTATION ONLY, NOT FOR INSTALLATION.



HCS - SRO Offices - Warhawk Fieldhouse Modifications

47 LEMON STREET MCDONOUGH, GA 30253

FINAL DOCUMENTS

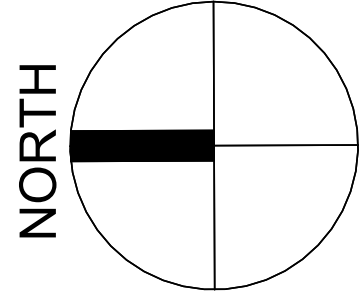

Architectural Registration No. 9020

CLIENT		
HENRY COUNTY SCHOOLS		
DATE		PROJECT NUMBER
06 / 18 / 2026		250306
DRAWING HISTORY		
No.	Description	Date
CHECKED BY: RV		
DRAWN BY: KM		

FINISH PLAN