


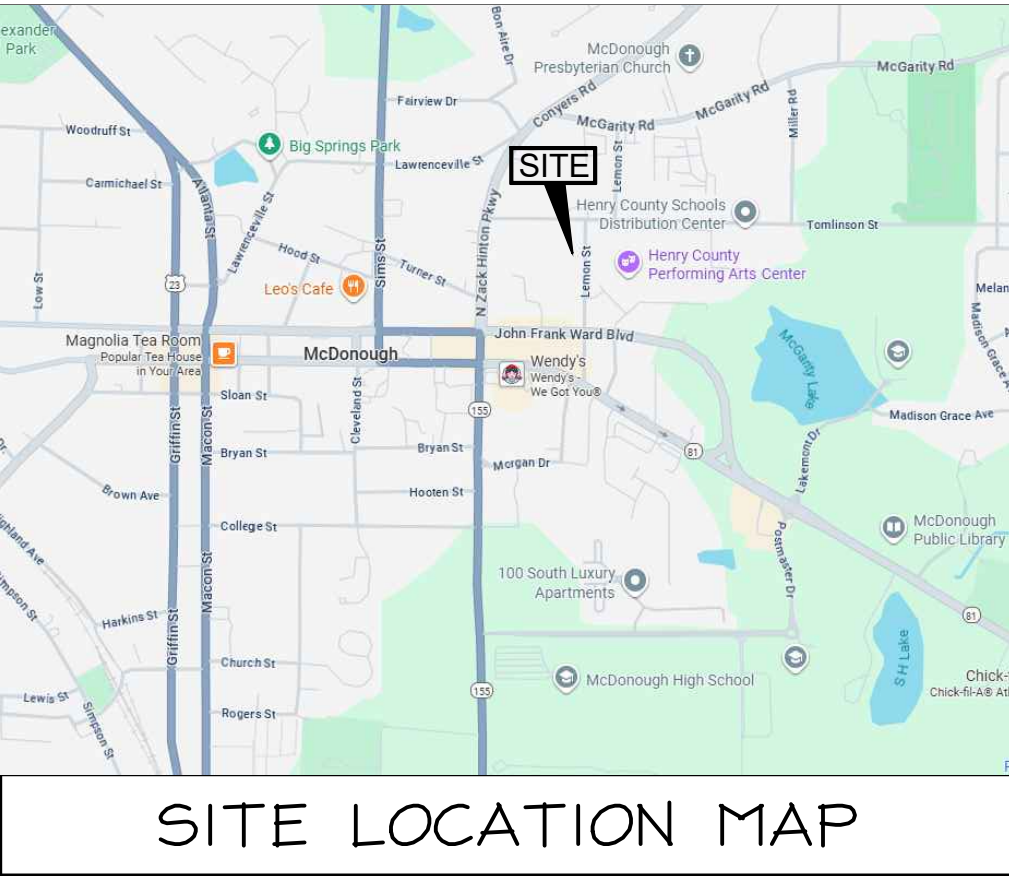

PRB

770-227-5473

GRIFFIN, GA

www.prb.com

GEORGIA811
www.Georgia811.com


Contact 811 before you dig.

HCS - SRO Offices - Warhawk Fieldhouse Modifications


FINAL DOCUMENTS



6310 Peake Road, Suite 200
Macon, GA 31210
(478) 219-2600

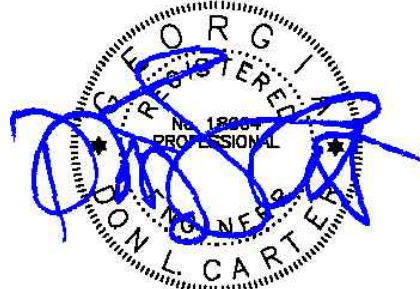

LEVEL II CERTIFIED
DESIGN PROFESSIONAL # 2061
ISSUED: 11/2/2023 EXPIRES: 11/2/2028

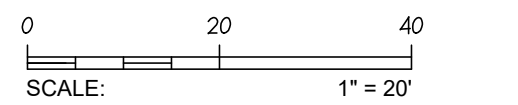[illegible]

SITE GRADING AND DRAINAGE PLAN

C4.1

BUILDING PLOT NOTE:
NO BUILDING PLOTS ARE ALLOWED ON-SITE.

CONSTRUCTION NOTES:

1. CONTRACTOR SHALL VERIFY LOCATIONS AND DEPTHS OF ALL EXISTING UTILITIES IN THE PROJECT AREA PRIOR TO BEGINNING EXCAVATIONS.
2. REFER TO SPECIFICATIONS FOR PRODFLOORING AND COMPACTION REQUIREMENTS.
3. MAXIMUM CUT AND FILL SLOPES ARE 3:1 UNLESS OTHERWISE NOTED ON PLANS.
4. NOTIFY CITY OF MICHIGAN INSPECTOR 48 HOURS PRIOR TO BEGINNING CONSTRUCTION.
5. CONTRACTOR SHALL ERECT TEMPORARY CONSTRUCTION SIGNS TO ALERT MOTORISTS OF THE PRESENCE OF TRAFFIC ROUNDS AND TRAFFIC ROUNDS AS NECESSARY DURING CONSTRUCTION. SIGNAGE SHALL BE IN ACCORDANCE WITH MUTCD AND CITY REQUIREMENTS.
6. CONTINUOUS ACCESS TO ADJACENT PROPERTIES SHALL BE MAINTAINED DURING ALL PHASES OF CONSTRUCTION.
7. ALL CONSTRUCTION SHALL BE IN ACCORDANCE WITH CITY OF MICHIGAN SPECIFICATIONS AND REQUIREMENTS.
8. THE CONTRACTOR SHALL MAINTAIN THE SITE CLEAN AND ORDERLY AT ALL TIMES.

AS-BUILT NOTES:

1. CONTRACTOR SHALL FURNISH AS-BUILT DRAWINGS OF ALL WORK AS REQUIRED BY SPECIFICATIONS AND CITY OF MICHIGAN DEPARTMENTS.
2. CONTRACTOR SHALL PROVIDE TO OWNER AND ENGINEER AN AS-BUILT TOPOGRAPHIC SURVEY OF ALL STORMWATER BIPS (PONDS, UNDERGROUND DETENTION, STORMWATER TREATMENT UNITS, ETC.) PREPARED BY A G.A. REGISTERED SURVEYOR. SURVEY SHALL INCLUDE SIZES AND INVERTS OF ALL PIPES, INCLUDING BUT NOT LIMITED TO AN ENLARGED DETAIL OF STORMWATER CONTROL STRUCTURE. SURVEY SHALL BE PERFORMED TO HORIZONTAL AND VERTICAL ALIGNMENT CONSISTENT WITH THE CONSTRUCTION DRAWINGS.
3. ENGINEER SHALL REVIEW ALL COMPLETED AS-BUILT DOCUMENTS FOR CERTIFICATION PRIOR TO SUBMITTAL TO CITY.
4. HENRY COUNTY BOARD OF EDUCATION SHALL BE RESPONSIBLE FOR MAINTENANCE OF ALL STORMWATER MANAGEMENT FACILITIES ONCE CONSTRUCTION IS COMPLETE. THEREFORE, NO MAINTENANCE EXPENSES SHALL BE CONVEYED TO CITY OF MICHIGAN.