

MECHANICAL SPECIFICATIONS

- 1) Provide all heating, ventilation and air conditioning items indicated on the drawings, described in this specification or required for a complete and proper installation.
- 2) Comply with all pertinent codes, ordinances and regulations. Refer to website for Dept. of Community Affairs for current Codes Editions.
- 3) The contractor shall not attempt to precisely scale dimensions from these drawings to obtain construction dimensions and clearances. The contractor shall verify all actual dimensions and clearances. Although these plans are diagrammatic in nature, they shall be followed as closely as site conditions, new construction, and work by other trades shall permit. Deviations from these drawings, which are required to conform to the actual building construction, shall be made at no additional cost to the owner.
- 4) Furnish without extra charge, any additional material and labor required to comply with the above codes and standards, even though the work may not be described in the contract documents. Where the requirements of the contract documents exceed the requirements of the above codes and standards, the contract documents shall take precedence.
- 5) All equipment and material shall be new and of first quality. Equipment and material shall be the same or equal to the basis of design listed on these drawings and shall be UL listed.
- 6) Cooperate and coordinate with other trades in order that all systems in the work may be installed in the best arrangement.
- 7) Examine the areas and conditions under which work of this section will be installed. Correct conditions detrimental to the proper and timely completion of the work. Notify Architect of any discrepancies. Do not proceed until unsatisfactory conditions have been corrected.
- 8) Avoid interference with structure, and with work of other trades. Install all equipment per manufacturer's instructions. Install accessible parts, including equipment, coils, valves, dampers, controls, and filters with adequate clearance for inspection, adjustments, repair and replacement.
- 9) All other materials not specifically described but required for a complete and proper installation shall be as selected by the contractor subject to acceptance by the Engineer.
- 10) All ductwork shall be fabricated from galvanized sheet metal duct and conform to SMACNA HVAC Duct Construction Standards--Metal and Flexible. Seal all joints in ductwork with mastic sealant.
- 11) Flexible duct: Flexmaster; Atco UPQ36(R-6.0); Atco UPQ31 (R-8) or Thermaflex, Type 3, insulated, 5'-0" Maximum length unless noted otherwise. Class 1 rating with R-value of 6.0 when located inside building insulation envelope and R-8 when located outside building insulation envelope. Install with no more than 135 degrees maximum of total bends per run. Maximum individual bend shall not exceed 45 degrees each. Support at five feet on centers with hangers having at least 2-inches of width at duct contact points. Flexible connectors shall not pass through any wall floor or ceiling weather rated or not. Provide 36-onches of metal duct at penetration of draft stops, fire walls and smoke walls.
- 12) Outside duct insulation (supply and return): 2" thick, 6#/C.F. density rigid glass fiber insulation with foil scrim vapor retarding jacket. smooth side. Owens Corning 705 or equivalent. Wrap duct with Alumaguard covering to form vapor tight enclosure of duct. Provide 6" wide by 18-gauge saddle at duct supports. Overall insulation value must be R-8 for exterior duct as per ASHRAE 90.1 & IECC.
- 13) Duct Liner: Owens Corning Aeroflex Plus, or equivalent. Incombustible glass fiber complying with ASTM C 1071; flexible blanket; impregnated surface and edges coated with acrylic polymer shown to be fungus and bacteria resistant by testing to ASTM G 21. Apparent Thermal Conductivity: Maximum of 0.31 at 75 degrees F. Service Temperature: 250 degrees F. Density: 1.5 pounds/cubic foot. Install using adhesive (50% coverage) and galvanized steel fasteners with welded press-on head Thickness: 1--inch.
- 14) Condensate drain piping shall be ASTM D2665 PVC with solvent welded fittings. Drain piping shall be no smaller than the drain connection size on equipment. Slope at 1/8 inch per foot continuously toward drains. All indoor condensate drain piping shall be insulated with preformed flexible plastic cellular foam. All outdoor condensate drain piping shall be primed and painted with a coating system recommended by the piping manufacturer for protection against deterioration from weather and UV-light exposure. All piping shall be adequately supported to maintain proper slope and avoid sagging.
- 15) Thermostats: Provide 24 volt, programmable 24 hour, 7 day thermostat to control heating stages in sequence with delay between stages and supply fan to maintain temperature setting. For Heat Pumps include system selection switch heat--off--cool and fan control switch (auto--on), emergency heat switch (auxiliary/emergency heat indicator lights).
- 16) Provide fire and smoke rated flexible connections between fans and ducts. Material shall comply with NFPA 90A requirements for material in supply air stream.
- 17) Install all equipment in accordance with manufacturer's instructions and recommendations including clearances recommended for proper operation or service. All filters and serviceable parts shall be readily accessible.
- 18) Indoor duct insulation: Fall-faced fiberglass, Owens Corning type 75 or equal, 2.2" thick(R-6), unless the insulated duct is outside building insulation envelope (attic, crawlspace or unconditioned space) in which case the duct insulation thickness shall be 3" thick(R-8). Duct shall have a flame spread rating of not more than 25 and smoke developed rating of not more than 50. Glass-Fiber insulation: All service duct wrap with foil scrim and having backing and a k-value of 0.30 at 75° F mean temperature and an average maximum density of 0.75 lb/cu. ft.
- 19) All supply, return, and exhaust air ducts shall be insulated. Exhaust ducts shall be installed with a 1/8" slope to outside. Install acoustical duct liner on the interior surface of the first five (5) linear feet of supply duct downstream and the last five (5) linear feet of return duct upstream of rooftop units. Insulate the concealed tops of all ceiling mounted supply air diffusers with fall-faced fiberglass, 1.5#/cubic foot density, 2" thick. Seal edges to ceiling grid with foil faced tape to provide vapor tight seal.
- 20) All low pressure duct branches shall contain manual balancing dampers. Manual balancing dampers shall also be installed in the continuation of the main, if the main duct is smaller or the same size as the branch duct, or if the continuation of the main serves only one device.
- 21) Make all duct elbows right angle type with single --thickness turning vanes or construct with centerline radius 1--1/2 times the duct width.
- 22) Duct sizes shown on plans are clear, interior dimensions. Duct sizes shown shall be enlarged to allow for liner at locations of interior liner.
- 23) Do not cut into or reduce the size of any structural member without the permission of the Architect.
- 24) Provide weather--proof flashing at all duct and pipe penetrations through the building walls and roof. As a minimum, flashings shall be designed and installed in accordance with SMACNA standards. Flashings shall be guaranteed weatherproof.
- 25) Support all HVAC units, ductwork, piping and other appurtenances from structure, provide vibration isolation at all fans which are not internally isolated. Provide hanger rod with built in rubber--in--shear isolator. Between drain pan and unit provide 4 each rubber--in--shear isolator. Do not attach vibration isolator to drain pan. Do not screw or drive fasteners into non--structural components such as roof decks or non-load bearing walls.
- 26) Thoroughly clean all components and remove all dirt, scale, oil, and other foreign substances. Provide clean air filters for all equipment.
- 27) Perform all tests necessary to demonstrate the integrity of the complete installation to the approval of the Engineer and all other authorities having jurisdiction. Make all adjustments necessary and balance the completed system in accordance with the data shown. Balance the systems in accordance with NEBS or AISC standards. Acceptable tolerances shall be minus ten percent to plus five percent of all measurements. Balancing shall be done by an independent licensed (by NEBS or AISC) TAB contractor. Make the following tests and submit reports to the Architect:
 - a) Airflow rate at each supply, return and exhaust outlet or inlet.
 - b) Total airflow rate and total static pressure for each supply and exhaust fan. Test exhaust fans with room doors closed.
 - c) Motor speed, for multiple speed fans (e.g. high, medium, low).
 - d) For direct drive fans, provide speed settings and actual rpm, including ECM motor driven fans
 - e) Provide fan and motor rpm for belt driven fans. Provide sheave sizes.
 - f) Outside airflow rate to each HVAC unit and supply fan.
 - g) Motor current (and compare with nameplate data) at all motors.
 - h) Entering and leaving air dry-bulb and wet-bulb conditions at all cooling coils.
 - i) Heat output capacity for unit heaters, heating devices and coils (kW or MBH).
 - j) Manufacturer, model and serial number for each piece of HVAC equipment scheduled on drawings.
 - k) Calibrate thermostats to be within one degree of actual temperature at thermostat.
 - l) Verify that all HVAC devices operate as scheduled or indicated (i.e. ON--OFF, 2--stage, variable output (SCR heaters), etc.
- 28) The entire system shall be warranted for a period of one (1) year beginning with Owner's acceptance of the work. Compressors shall include a minimum of five (5) year parts only warranty from the manufacturer. All labor and materials necessary to repair or replace the system or portions thereof, during that time shall be warranted for a period of one (1) year from the repair or replacement.
- 29) SUBMITTALS AND SUBMITTAL PROCEDURES:
 - a. Contractor shall review the submittal data and check for the purpose of compliance with safety requirements, verification of dimensions, contract documents and methods and means prior to submitting to design professional. Contractor shall indicate approval by indicating such on the submittal.
 - b. Transmit each submittal electronically in PDF format.
 - c. Sequentially number submittal files and transmittal form. Revise submittals with original number and a sequential alphabetic suffix. File names shall describe item included in file.
 - d. Identify Project, the Contractor, Subcontractor or supplier; pertinent drawing and detail number, and specification section number, as appropriate on each copy. Each file shall include an index of items included in file.
 - e. Apply the Contractor's stamp, signed or initialed certifying that review, approval, verification of Products required, field dimensions, adjacent construction Work, and coordination of information is in accordance with the requirements of the Work and Contract Documents.
 - f. Submittal data for all items in project shall be submitted at one time. Submittal shall be divided into groups with file sizes not exceeding 6 MB. If there is unavailable data such as control submittal, etc., these may be submitted later if not doing so would delay project progress. Data shall include capacities, complete installation instructions, dimensional data and electrical data, BHP, motor HP, operating weights and load distribution at mounting points.
 - g. Deliver submittals electronically to the Design Professional.
 - h. Schedule submittals to expedite the Project, and coordinate submission of related items.
 - i. For each submittal for review, allow 15 days excluding delivery time to and from the Contractor.
 - j. Identify variations from Contract Documents and Product or system limitations that may be detrimental to successful performance of the completed Work.
 - k. Provide space for the Contractor and the Architect's/ review stamps.
 - l. When revised for resubmission, identify all changes made since previous submission.
 - m. Distribute copies of reviewed submittals as appropriate. Instruct parties to promptly report any inability to comply with requirements.
 - n. Submittals not requested will not be recognized or processed.
 - o. Provide files containing only related items (such as piping, equipment, air distribution, etc.)
- 30) Instruct Owner's representative in the operation of the systems, using the operation and maintenance manual as a teaching aid.
- 31) Provide an operation and maintenance manual. As a minimum, the manual shall contain:
 - a. A complete list of all equipment and appurtenances with equipment designations (per Drawings), manufacturers, and catalog numbers.
 - b. Copies of manufacturers' brochures and instructions for operation and maintenance of all mechanical equipment, including replacement parts lists.
 - c. Typed system operation and maintenance instructions, including inspection, lubrication, and service instructions and schedules.
 - d. List of names, addresses and phone numbers of distributors of all equipment and appurtenances.
 - e. Manufacturers' warranties.
- 32) Provide a duct smoke detector on the supply duct of each rooftop unit with design airflow exceeding 2,000 CFM. Install detector in accordance with the International Mechanical Code section 606 Smoke Detection Control System with Georgia Amendments 2018. Detectors shall be provided by the electrical/fire alarm subcontractor and shall be installed by the mechanical subcontractor. For other fans, such as exhaust fans with design airflow exceeding 2,000 CFM, coordinate with the electrical/fire alarm subcontractor to provide room or duct smoke detectors. Where no fire alarm system is installed in building provide smoke detector, audio visual annunciator and trouble indicator in an approved location. Duct smoke detector trouble conditions shall activate a visible or audible signal in an approved location and shall be identified as air duct detector trouble. Provide contacts to automatically shut down all such fan motors when smoke is detected, to indicate detector status to the fire alarm system, and to require a manual reset of the shut-down relay.
- 33) Fire damper; curtain type with blades outside air stream except when located behind grilles when blades may be in air stream. Provide 1--1/2 hr class unless noted otherwise, vertical or horizontal mounting as shown on drawings with re--placeable, rated, fusible link. Duct--Mounted Access Doors: Provide access doors for access to fire or smoke dampers having fusible links, doors shall be pressure relief access doors; and shall be outward operation for access doors installed upstream from dampers and inward operation for access doors installed downstream from dampers adjacent to and close enough to fire or smoke dampers, to reset or reinstall fusible links. Fabricate access panels according to SMACNA's HVAC Duct Construction Standards -- Metal and Flexible"; Figures 2--10, "Duct Access Doors and Panels," and 2--11, "Access Panels -- Round Duct."
- 34) Grilles, Registers and Diffusers: Grilles, registers, and diffusers as indicated on the drawings have been selected from the catalog of the manufacturer noted as the basis of design. Sizes, types, and performance of the devices to be provided must be coordinated to insure conformity with design basis. Sideload supply grilles and registers shall have vertical front blades; sideload return grilles shall have horizontal blades. Grilles and registers with borders shall have felt or rubber gaskets cemented to the back face and hiding screws not over 18 inches on centers around the perimeter. Hiding screws shall be countersunk to fit flush with face of grille or register. Grilles passing air through partition shall be as described for wall return grilles, one for each side of partition. Register dampers shall be of the gang--operated, opposed blade type, operated through the face of the register. Operating mechanism shall not project through the register face. Mounting frame shall be coordinated with architectural reflected ceiling plans. Construction shall be of steel or aluminum as scheduled, with frame type to match ceiling construction. Sideload supply grilles and registers shall be double--deflection type, with vertical front vanes. Construction shall be of steel, with 3/4 inch blade spacing. Return air grilles, return air registers, exhaust grilles, exhaust registers and transfer air grilles located in ceilings shall be constructed of aluminum with "egg--crate" design, with 1/2 inch x 1/2 inch x 1/2 inch grids. Frame style shall be compatible with ceiling construction. Install wall grilles and registers with horizontal edges parallel to ceiling. Concentric diffuser assemblies at roof top units shall have paint--ready exterior finish and 1--inch lined supply and return ducts that transition to diffuser size within 24 inches vertically of the bottom of roof top unit curb.
- 35) Basic motor requirements: basic requirements apply to mechanical equipment motors, unless otherwise indicated. Motors 1/2 hp and larger: Polyphase, unless otherwise scheduled. Motors smaller than 1/2 hp: single phase. Frequency rating: 60 Hz. Service factor: according to NEMA MG 1, general purpose continuous duty, design type "B." Enclosure: open drip--proof, unless otherwise indicated. Efficiency: motors shall have a higher efficiency rating than industry standard average motor as delineated in IEEE Standard 112, test method 13. Thermal protection: where indicated or required, internal protection automatically opens power supply circuit to motor when winding temperature exceeds a safe value calibrated to temperature rating of motor insulation. Thermal protection device automatically resets when motor temperature returns to normal range, unless otherwise indicated.
- 36) Hangers and supports: Building attachments: concrete inserts or structural--steel fasteners appropriate for building materials, and beam clamps. Hanger materials: galvanized, sheet steel or round, threaded steel rod. Hangers installed in corrosive atmospheres: electrogalvanized, all--thread rod or galvanized rods with threads painted after installation. Straps and rod sizes: comply with SMACNA's HVAC Duct Construction Standards--Metal and Flexible" for sheet steel width and thickness and for steel rod diameters. Duct attachments: sheet metal screws, blind rivets, or self--tapping metal screws; compatible with duct materials. Trapeze and riser supports: galvanized steel shapes and plates: steel shapes complying with ASTM A 36/A 36M.
- 37) Sealant materials: joint and seam sealants, general: the term "sealant" is not limited to materials of adhesive or mastic nature but includes tapes and combinations of open--weave fabric strips and mastics. Joint and seam tape: 2 inches wide; glass--fiber fabric reinforced. Joint and seam sealant: one-part, nonsag, solvent--release--curing, polymerized butyl sealant, formulated with a minimum of 75 percent solids. Flanged joint mastics: one--part, acid--curing, silicone, elastomeric joint sealants, complying with ASTM C 920, type S, grade NS, class 25, use 0.
- 38) Packaged Roof Top Units--Gas Heat: Outdoor packaged units, roof mounted, electrically controlled, 2--stage cooling with gas heat units, as scheduled, utilizing scroll hermetic compressor(s) for cooling duty and an indirect fired gas furnace section for heating duty. Unit shall discharge supply air horizontally or vertically(refer to schedules). Unit shall exceed ASHRAE 90.1--2001 Energy Standards, be rated in accordance with ARI Standards 210/240 or 360 and 270, in accordance with UL Standard 199S, conform to ASHRAE 15, latest revision, be UL--tested and certified in accordance with ANSI Z21.47 Standards. Factory assembled, single-piece heating and cooling unit. Contained within the unit enclosure shall be all return air wiring, piping, controls, refrigerant charge, and thermal expansion valve. Unit cabinet shall be constructed of galvanized steel, and shall be phosphatized/dimensionalized and coated with a pre-painted baked enamel finish on all exteriorly exposed surfaces. Coils shall have aluminum fins mechanically bonded to copper tubing. Evaporator fan compartment interior cabinet surfaces shall be insulated with a minimum 1/2--in. thick, 1 lb. density, flexible fiberglass insulation, meeting the requirements of ASHRAE Standard 62P. Aluminum fall-faced fiberglass insulation shall be used in the gas heat compartment. Insulation and adhesive shall meet NFPA 90A requirements for flame spread and smoke generation. Cabinet panels shall be easily removable for servicing. Condenser coils shall have protective wire guards. Unit shall have a factory--installed, sloped condensate drain pan made of a non--corrosive material, with a minimum 3/4--in.--14 NPT connection and shall comply with ASHRAE Standard 62. Unit shall have 2--inch pleated MERV 7 disposable filters a removable, filter access panel to provide filter access. Unit shall have standard thru--the--bottom utility connection capability and accessory powered convenience receptacles. Provide matching pre--fabricated roof curb with direct, duct attachment capability. Provide low and high pressure safety switches, anti--short cycle safety, and low ambient operation. Provide microprocessor control panel and complete, factory--wired controls, including discharge air temperature sensor, and communications interface. Refer to schedule for layout basis. Substitutions shall match the features of specified model. Provide condensate overflow switch (Rectorseal Safe--T--Switch Model SSI or equivalent) wired to shut unit down in case of condensate overflow. Refer to Schedule on Drawings for additional specifications.

39) All HVAC equipment such as AH, CU, EF, AC, HP, and RTU shall have visible nameplates with their associated marks on them.

40) Ceiling Ventilator shall have corrosion resistant galvanized steel housing with four-point mounting capability. It shall be ducted to a cap on wall or roof using round ductwork. Blower assembly shall be removable, have a centrifugal--type blower wheel and a permanently lubricated motor designed for continuous operation. Non--metallic damper/duct connector shall be included. Air delivery shall be no less than scheduled and sound level no greater than scheduled. All air and sound ratings shall be certified by HV. Ceiling ventilator shall be Energy Star® qualified and have an energy efficient permanent split capacitor motor.

41) Kitchen Hood (KH-1): Provide under cabinet kitchen hood as scheduled. Kitchen hood shall be 30" wide. Hood shall have UL rated, class 2 filter located in the middle of the hood. Provide Grease filter GD--06, and Charcoal Filter CF--06. Hood body shall be made of 24 gauge, grade 430 stainless steel. Painted hood shall be 23 gauge cold rolled commercial grade (CRCO) steel. Auto welded. Hood shall have fully enclosed PSC 4 pole motor. Variable speed, thermally protected, permanently lubricated. Rated 115/120 Volts, 60 Hz. Hood shall have enclosed in a polycarbonate lens, 60 watt max. Type A15 appliance lamp, complete with night light setting. Hood shall exhaust to outside by 10"x4" exhaust duct thru wall or 7" round ductwork thru roof or well as per drawing. Provide duct adaptor and damper. Provide Stainless steel finish for the hood.

42) The project shall be constructed in strict adherence to drawings and specifications. Constructability questions shall be addressed, in writing, to the Architect and Engineer of Record for resolution. Any deviations from these Drawings and Specifications documents without written consent from the Engineer of Record shall become the responsibility of the person or entity making the changes. That person or entity shall become solely responsible for any claims resulting from such changes.

43) Acceptable Manufacturers are:


Air Handlers & Heat Pumps, Packaged Units:	Carrier, Trane, York, Lennox
Grilles, Registers & Diffusers:	Titus, Nalor, Price, Tuttle & Bailey, Kruger, Metal Aire(Color selection submitted to Architect)
Fans:	Twain-City, Cook, Greenheck, PennBarry, Acme, American CoolAir, Captive Air, Solar & Palau
Louver/Dampers/Fire Dampers:	United Erectech, Greenheck, Ruskin, Arrow United, Lloyd Industries, Air Balance (Color selection submitted to Architect)
Controls--provided with unit:	Provide thermostats by same manufacturer as equipment.

**GM
Architect**

102 Sammy Court
WARNER ROBINS, GEORGIA 31088
glmarch@outlook.com
(478)-365-8976


ARCHITECT

STAMP INVALID UNLESS SIGNED

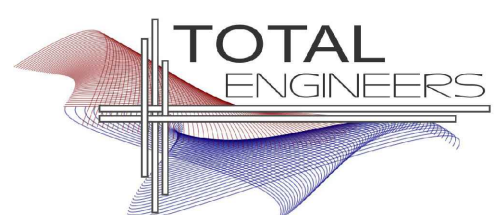

169 New Street, Macon, GA 31201
(478)741-4632 T.E. project # 25-007
www.totalengineers.com
GA COA NO # PEF009195 EXP: 06/30/2026

CONSULTANT

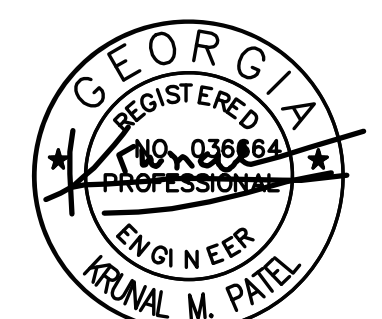

STAMP INVALID UNLESS SIGNED



10641 HIGHWAY 36
COVINGTON, GA 30014
770.786.3031

**Retrofit & Renovations for
Madison Methodist Church
Phase 2: Party Barn**
1091 Confederate Highway
Madison, Georgia 30650

JOB NO.:	02601
DRAWN BY:	KMP & MGT
CHECKED BY:	KMP
DESCRIPTION:	SCH-REVIEW-P2
DATE:	12.15.25
DESCRIPTION:	DD-REVIEW
DATE:	00.00.26
DESCRIPTION:	CD-REVIEW
DATE:	00.00.26
DESCRIPTION:	BID-CONSTRUCTION
DATE:	00.00.26
REVISIONS:	
1	00.00.26
2	
3	
4	
5	
6	
7	

THESE DRAWINGS ARE THE PROPERTY OF GMARCHITECT AND ARE NOT TO BE REPRODUCED OR HELD WITHOUT PERMISSION AND CREDIT.
COPYRIGHT © 2026

SHEET

M0.1

OF