


Plot Date: 4/27/2025 6:48:26 PM Path: Autodeskt Doss://NCWSA Admin Bldg._V2502506683-NCWSA Office Addition-R25-STRUCT.rvt

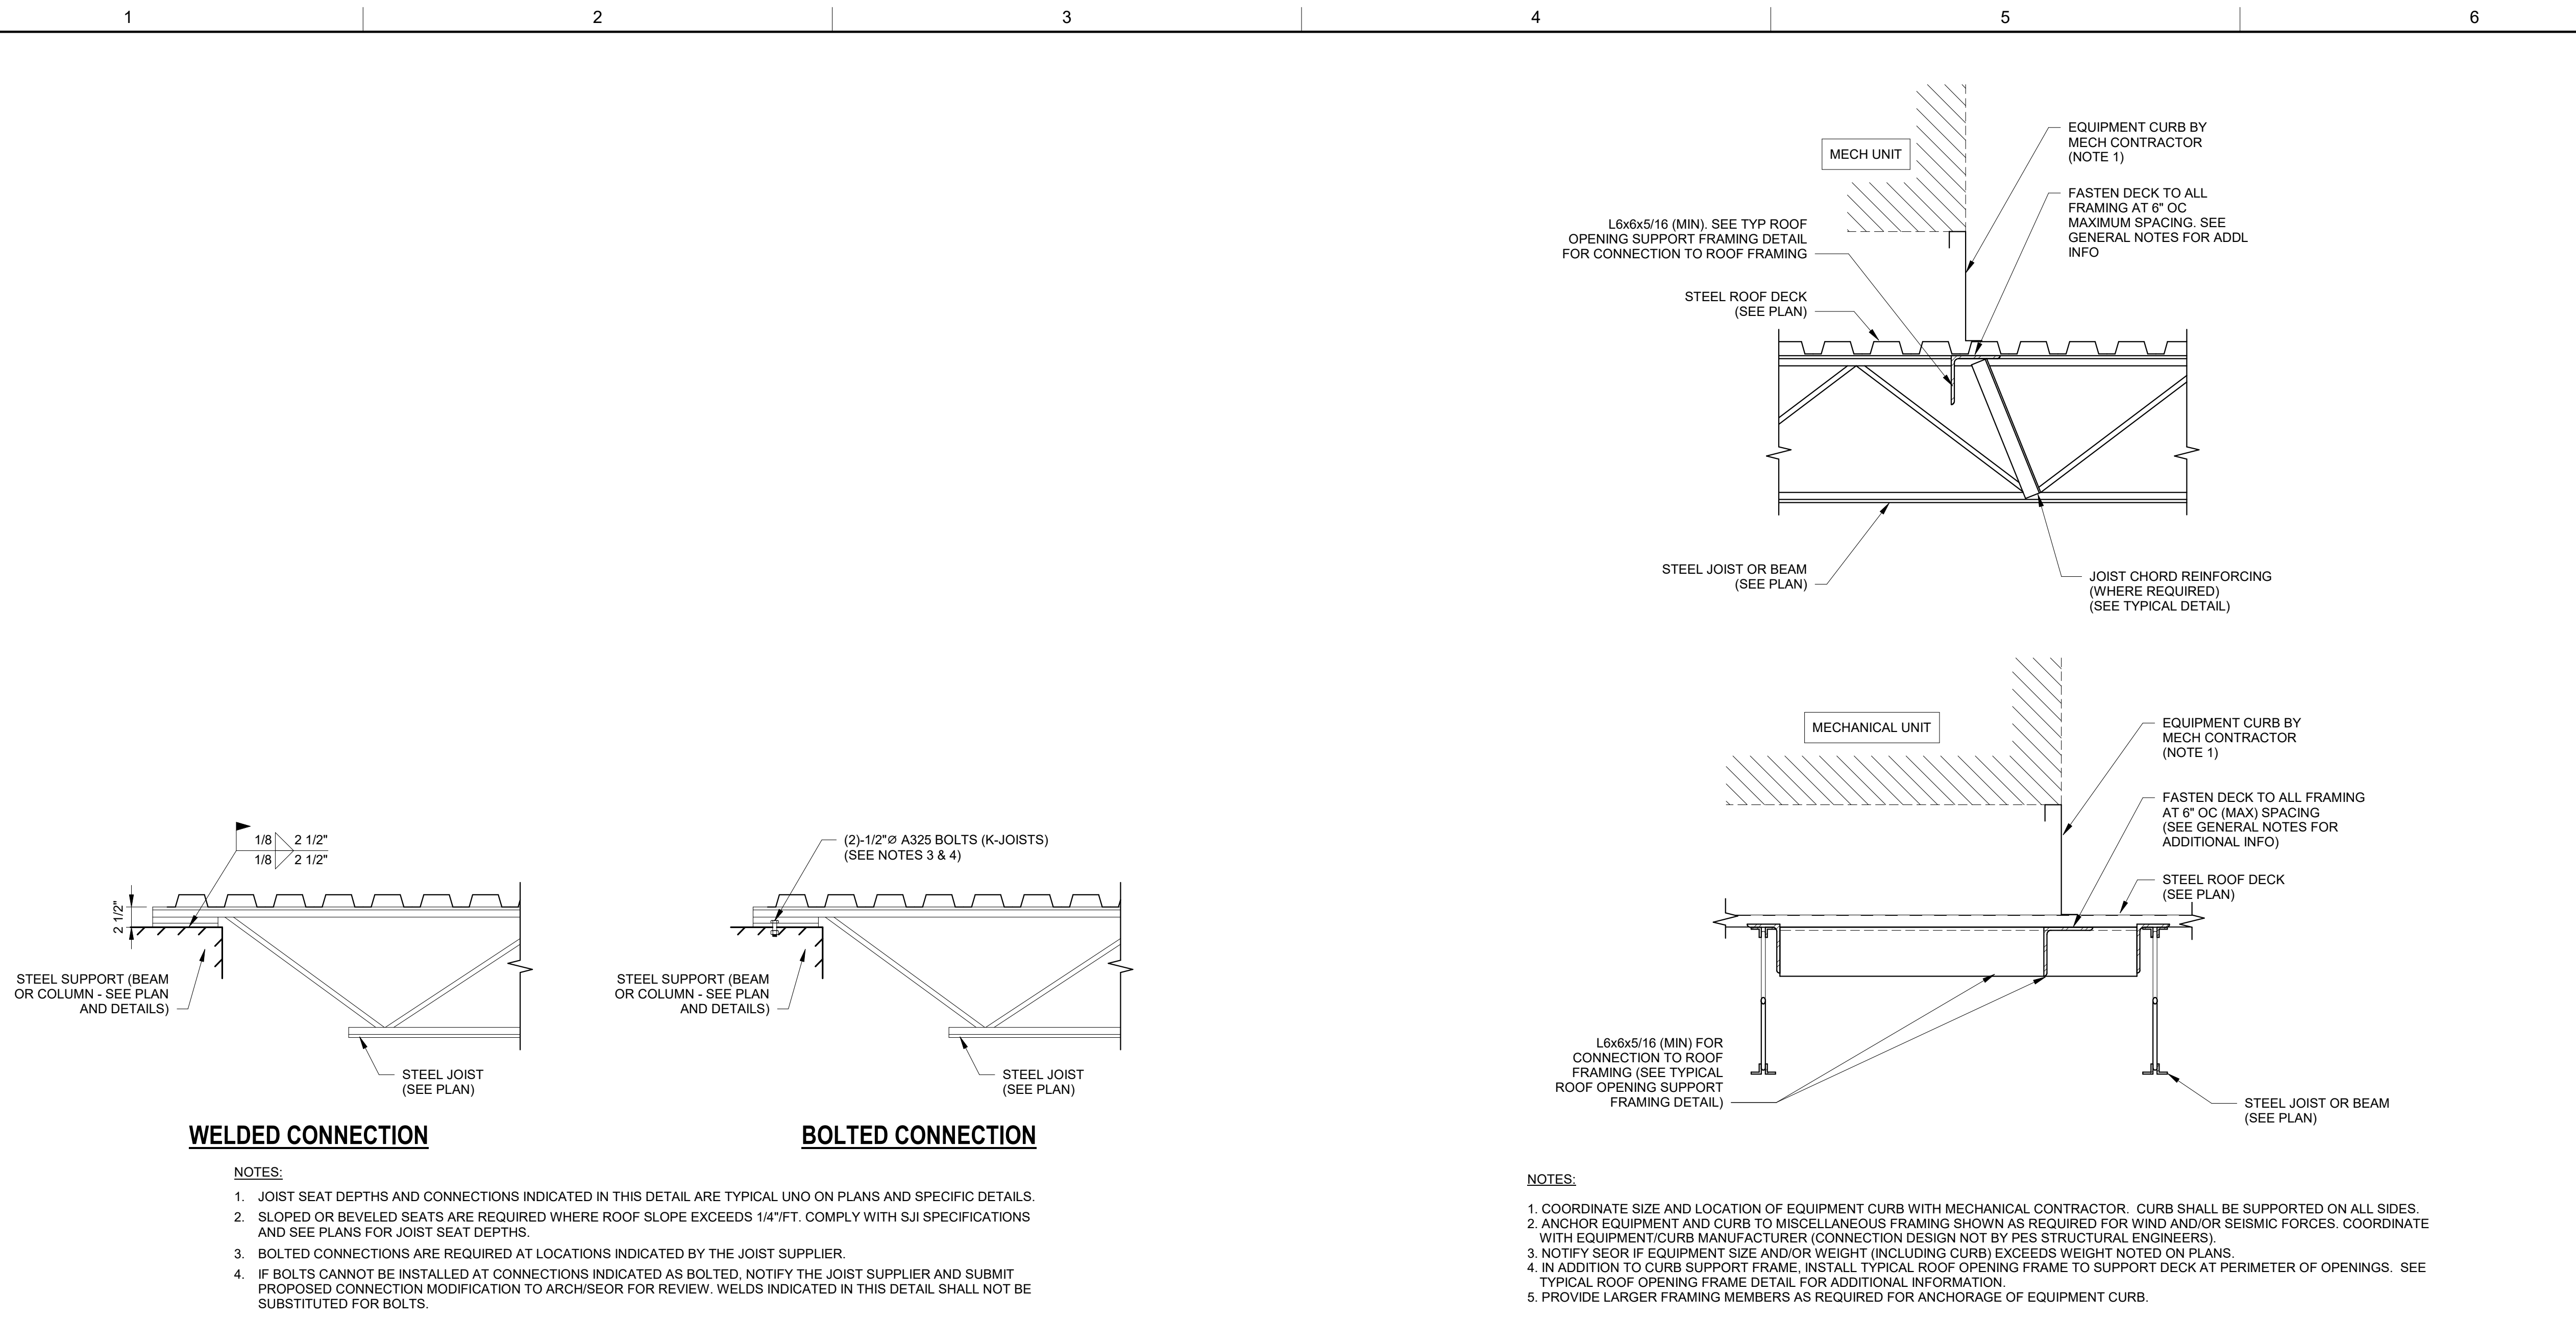

WELDED CONNECTION

NOTES:

1. JOIST SEAT DEPTHS AND CONNECTIONS INDICATED IN THIS DETAIL ARE TYPICAL UNO ON PLANS AND SPECIFIC DETAILS.
2. SLOPED OR BEVELED SEATS ARE REQUIRED WHERE ROOF SLOPE EXCEEDS 1/4"/FT. COMPLY WITH SJI SPECIFICATIONS AND SEE PLANS FOR JOIST SEAT DEPTHS.
3. BOLTED CONNECTIONS ARE REQUIRED AT LOCATIONS INDICATED BY THE JOIST SUPPLIER.
4. IF BOLTS CANNOT BE INSTALLED AT CONNECTIONS INDICATED AS BOLTED, NOTIFY THE JOIST SUPPLIER AND SUBMIT PROPOSED CONNECTION MODIFICATION TO ARCH/SEOR FOR REVIEW. WELDS INDICATED IN THIS DETAIL SHALL NOT BE SUBSTITUTED FOR BOLTS.

TYPICAL STEEL JOIST SEAT CONNECTIONS - SECTION

SCALE: 1" = 1'-0"

1
S522

TYPICAL EQUIPMENT CURB SUPPORT - SECTION

SCALE: 1" = 1'-0"

NOTES:

1. COORDINATE SIZE AND LOCATION OF EQUIPMENT CURB WITH MECHANICAL CONTRACTOR. CURB SHALL BE SUPPORTED ON ALL SIDES.
2. ANCHOR EQUIPMENT AND CURB TO MISCELLANEOUS FRAMING SHOWN AS REQUIRED FOR WIND AND/OR SEISMIC FORCES. COORDINATE WITH EQUIPMENT/CURB MANUFACTURER (CONNECTION DESIGN NOT BY PES STRUCTURAL ENGINEERS).
3. NOTIFY SEOR IF EQUIPMENT SIZE AND/OR WEIGHT (INCLUDING CURB) EXCEEDS WEIGHT NOTED ON PLANS.
4. IN ADDITION TO CURB SUPPORT FRAME, INSTALL TYPICAL ROOF OPENING FRAME TO SUPPORT DECK AT PERIMETER OF OPENINGS. SEE TYPICAL ROOF OPENING FRAME DETAIL FOR ADDITIONAL INFORMATION.
5. PROVIDE LARGER FRAMING MEMBERS AS REQUIRED FOR ANCHORAGE OF EQUIPMENT CURB.

2
S522



BROWN AND CALDWELL
 900 HAMMOND DRIVE, SUITE 500
 ATLANTA, GA 30328



THIS DRAWING IS NOT VALID FOR CONSTRUCTION PURPOSES UNLESS IT BEARS THE SEAL AND SIGNATURE OF A DULY REGISTERED PROFESSIONAL

CONSTRUCTION DOCUMENTS



NCWSA OFFICE ADDITION

| REVISIONS | | |
|-----------|------|-------------|
| REV | DATE | DESCRIPTION |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

LINE IS 2 INCHES AT FULL SIZE

DESIGNED: Designer
 DRAWN: Author
 CHECKED: Checker
 CHECKED:
 APPROVED: Approver
 FILENAME

BC PROJECT NUMBER
 616202
 CLIENT PROJECT NUMBER

STEEL ROOF FRAMING DETAILS

DRAWING NUMBER
S522