GENERAL NOTES:

A. EXACT DEVICE LOCATIONS SHALL BE VERIFIED WITH THE ARCHITECTURAL PLANS & ELEVATIONS PRIOR TO ROUGH-IN TO ACCOMMODATE CASEWORK FURNITURE, WINDOWS, EQUIPMENT, ETC.

B. DEVICES & EQUIPMENT SHALL BE CENTERED IN A COMMON VERTICAL PLANE. HEIGHT SHALL BE MEASURED FROM FINISHED FLOOR TO CENTERLINE OF DEVICE, UNLESS OTHERWISE SHOWN OR INDICATED.

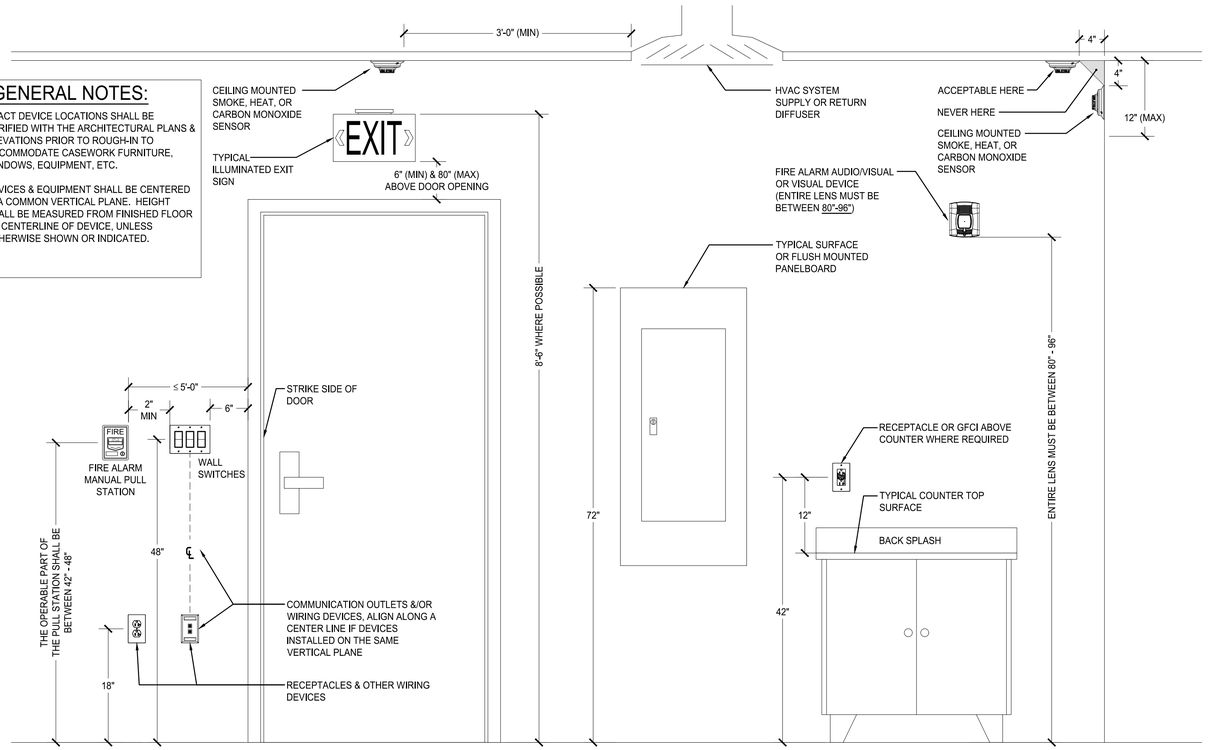

1 TYPICAL DEVICE & EQUIPMENT INSTALLATION HEIGHTS
SCALE: NONE



WALL MOUNTED PANELS

(INCLUDING POWER PANELS, CONTRACTORS, CONTROL CABINETS, DISCONNECT SWITCHES, MOTOR STARTERS, TIME CLOCK & SIMILAR ELECTRICAL EQUIPMENT)

NOTES:

A. XX** IDENTIFIES MINIMUM WORKING SPACE CLEARANCE REQUIREMENTS
(IN THE DIRECTION OF ACCESS TO LIVE PARTS AS REQUIRED PER NFPA 70, SECTION 110.26(a))
- 36" FOR 0-150V PHASE TO GROUND ELECTRIC EQUIPMENT.
- 42" FOR 150-600V PHASE TO GROUND EQUIPMENT (CONDITION 2 "LIVE TO GROUND")
- 48" FOR 150-600V PHASE TO GROUND EQUIPMENT (CONDITION 3 "BETWEEN LIVE EQUIPMENT")

B. MINIMUM WORKING SPACE HEAD ROOM SHALL BE 78" AFF.

2 TYPICAL ELECTRICAL EQUIPMENT CLEARANCES
SCALE: NONE

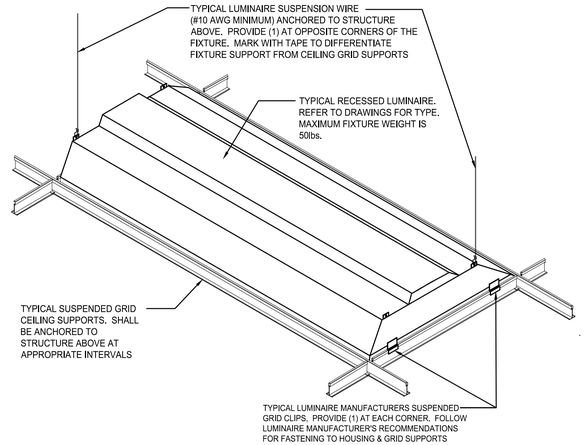

3 TYPICAL TROFFER INSTALLATION DETAIL
SCALE: NONE

BROWN AND CALDWELL
900 HAMMOND DRIVE, SUITE 500
ATLANTA, GA 30328

wendel

THIS DRAWING IS NOT VALID FOR CONSTRUCTION PURPOSES UNLESS IT BEARS THE SEAL AND SIGNATURE OF A DULY REGISTERED PROFESSIONAL

60% DESIGN DOCUMENTS

NCWSA
NEWTON COUNTY WATER & SEWERAGE AUTHORITY

NCWSA OFFICE ADDITION

REVISIONS

REV	DATE	DESCRIPTION

LINE IS 2 INCHES AT FULL SIZE

DESIGNED: MAP
DRAWN: MAP
CHECKED: JFW
CHECKED:
APPROVED:
FILENAME
BC PROJECT NUMBER 616202
CLIENT PROJECT NUMBER

ELECTRICAL

DETAILS

DRAWING NUMBER
E401