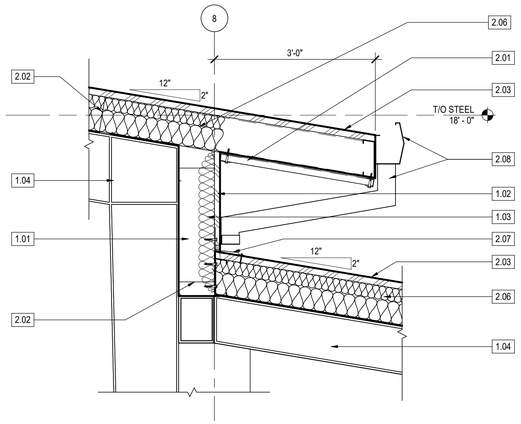

4 EAVE AND SHED ROOF DETAIL

A-411 | 3/4" = 1'-0"

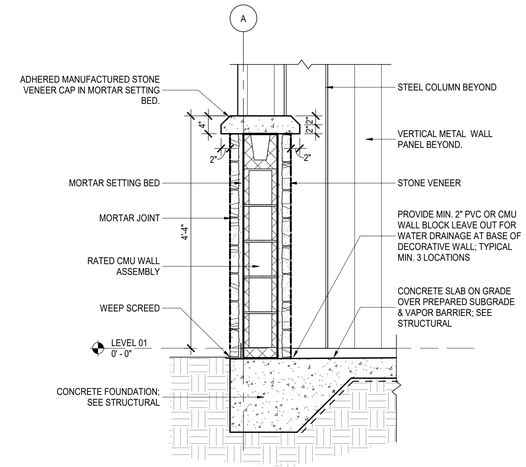

5 STONE-CLAD WALL DETAIL

A-411 | 3/4" = 1'-0"

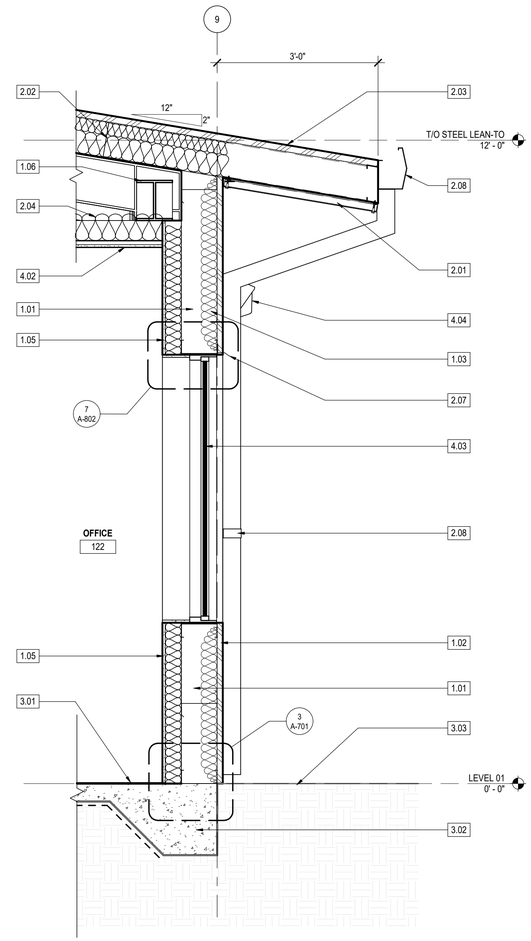

3 WALL SECTION 3

A-411 | 3/4" = 1'-0"

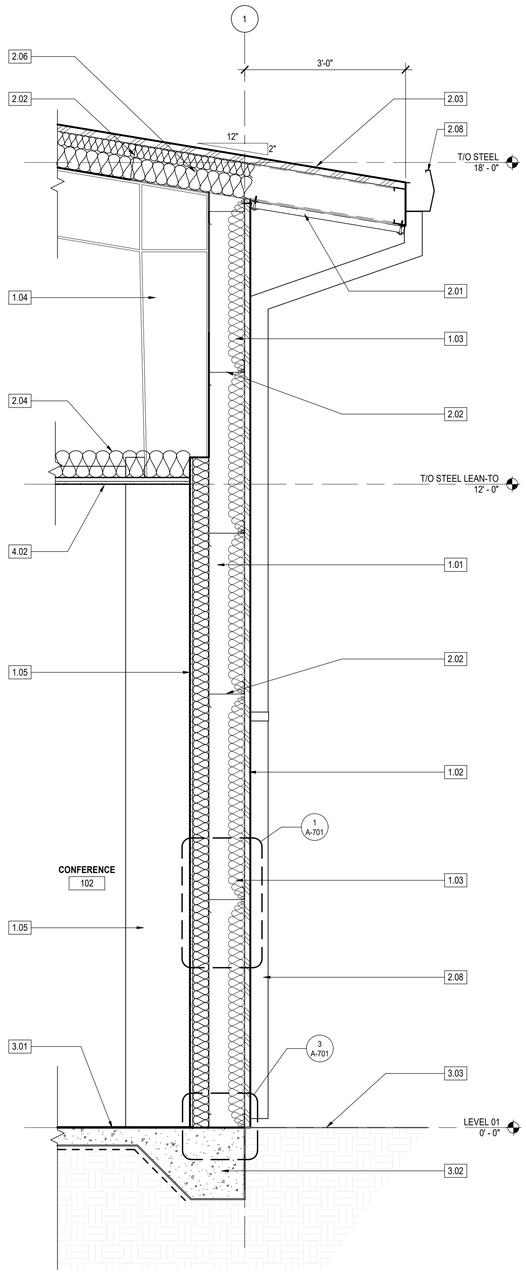

2 WALL SECTION 2

A-411 | 3/4" = 1'-0"

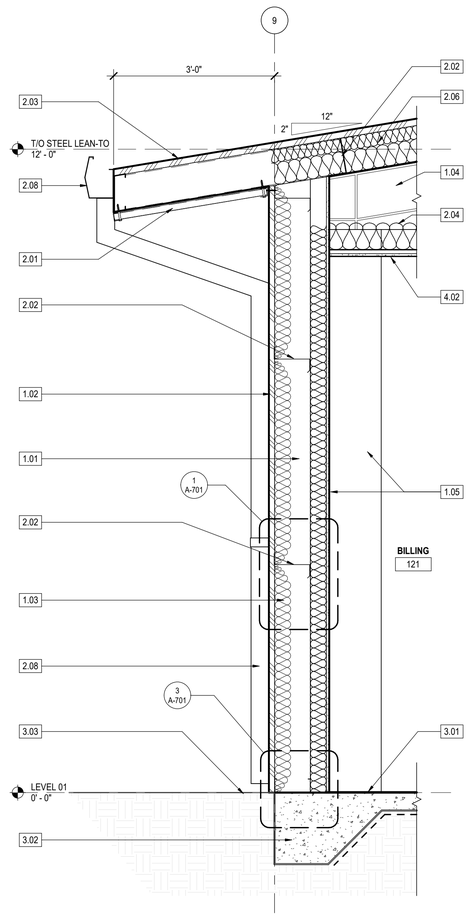

1 WALL SECTION 1

A-411 | 3/4" = 1'-0"

WALL SECTION KEYNOTES

1.01	8" GIRT WALL; PROVIDED BY PEMB SUPPLIER.
1.02	VERTICAL PBR WALL PANEL; PROVIDED BY PEMB SUPPLIER.
1.03	FACED R-13 METAL BUILDING INSULATION AT EXTERIOR WALLS; PROVIDED BY PEMB SUPPLIER
1.04	MAIN FRAME; SEE PEMB DRAWINGS
1.05	5/8" GWB ON THE INTERIOR SIDE OVER METAL STUD WALL W/ R-13 BATT INSULATION
1.06	WIND BENT FRAME; SEE PEMB DRAWINGS FOR FURTHER INFORMATION
2.01	SOFFIT LINER PANEL; BASIS OF DESIGN MBCI ARTISAN L12 WITH BEAD; PROVIDED BY PEMB SUPPLIER
2.02	8" Z- PURLINS; SEE PEMB DRAWINGS FOR FURTHER INFORMATION.
2.03	STANDING SEAM METAL ROOF PROVIDED BY PEMB SUPPLIER
2.04	6" SOUND BATT INSULATION ABOVE SCHEDULED CEILING.
2.05	GABLE TRIM WITH RAKE ANGLE ANCHORED TO END OF PURLINS; PROVIDED BY PEMB SUPPLIER
2.06	BLACK SIMPLE SAVER ROOF INSULATION SYSTEM (R-25 + R-19); PROVIDED BY PEMB SUPPLIER
2.07	PROVIDE FLASHING, TYP.
2.08	GUTTER AND DOWNSPOUT PROVIDED BY PEMB SUPPLIER. SURFACE DRAIN WITH SPLASHBLOCK
3.01	CONCRETE SLAB ON GRADE OVER PREPARED SUBGRADE AND VAPOR BARRIER; SEE STRUCTURAL.
3.02	CONCRETE FOUNDATION / FOOTING; SEE STRUCTURAL.
3.03	EXTERIOR PAVING / HARDSCAPE / SOFTSCAPE; SEE CIVIL DRAWINGS.
4.01	SCHEDULED DOOR; SEE A-800 FOR FURTHER INFORMATION
4.02	SCHEDULED CEILING; SEE A-201 FOR FURTHER INFORMATION
4.03	SCHEDULED WINDOW; SEE A-800 FOR FURTHER INFORMATION
4.04	SCHEDULED LIGHT FIXTURE; SEE ELECTRICAL SHEETS FOR FURTHER INFORMATION
5.01	SIGNAGE; PERMITTED SEPARATELY
5.02	INTERIOR LINER PANEL PROVIDED BY PEMB SUPPLIER

CSC DESIGN, INC.
ARCHITECTS & ENGINEERS
135 P RICKMAN INDUSTRIAL DR.
SUITE 100 CANTON, GA 30115
Phone: (770) 345-2579

© 2025, CSC Design. These drawings are protected by the copyright laws of the United States. These drawings or any part thereof may not be used for any purpose or reproduced in any form or by any means without the written consent of CSC Design.

PRICING ONLY NOT FOR CONSTRUCTION

PROJECT NUMBER: 25-038

REVISIONS
NO. DATE: ISSUE:

PEACH STATE CONSTRUCTION COMPANY OFFICE

265 PIPER ROAD
COVINGTON, GA 30014
NEWTON COUNTY, GEORGIA

PRICING ONLY NOT FOR CONSTRUCTION

WALL SECTIONS

A-411

PRICING ONLY