

STRUCTURAL FOUNDATION PLAN WILL NEED UPDATING ONCE REVISED PEMB DRAWINGS ARE PROVIDED.

HAIRPIN SCHEDULE	
MARK	HAIRPIN REINFORCING
HP1	#4 HAIRPIN
HP2	#6 HAIRPIN


PRE-ENGINEERED METAL BUILDING NOTES:

- P.E.M.B. MANUFACTURER COORDINATED SUSPENDED MECHANICAL UNITS AND LOADS WITH MECHANICAL DRAWINGS
- P.E.M.B. MANUFACTURER COORDINATE X BRACING AND/OR PORTAL FRAME COLUMN LOCATIONS WITH ARCHITECTURAL
- FOUNDATIONS INDICATED ARE BASED ON PRELIMINARY LOADS AND LAYOUT. FINAL FOUNDATION LOCATION AND DETAILS WILL BE DETERMINED AFTER FINAL P.E.M.B. MANUFACTURER LOADS ARE SUBMITTED

FOUNDATION NOTES:

- REFER TO ARCHITECTURAL DRAWINGS FOR INTERIOR WALL DIMENSIONS AND SLAB CONTROL JOINT LOCATIONS.
- 4" THICK 3000 PSI CONCRETE SLAB REINFORCED w/ 6X6-W1.4/W1.4 WWR LOCATED MID-DEPTH OF SLAB. REFER TO GEOTECHNICAL ENGINEER FOR SLAB ON GRADE/SUBGRADE PREPARATION REQUIREMENTS. REFER TO ARCHITECTURAL FOR RECESSES AND CONTROL JOINT LOCATIONS.
- ALL CONCRETE WORK SHALL CONFORM TO ACI 301 "SPECIFICATIONS FOR STRUCTURAL CONCRETE FOR BUILDINGS".
- FINISH FLOOR ELEVATION: SEE CIVIL

Structural Foundation Schedule			
Type Mark	Footing Dimensions	Reinforcing	Remarks
F-4	4'-0"x4'-0"x2'-0"	(4) - #5 EACH WAY	TOP AND BOTTOM
F-6	6'-0"x6'-0"x2'-0"	(6) - #5 EACH WAY	TOP AND BOTTOM

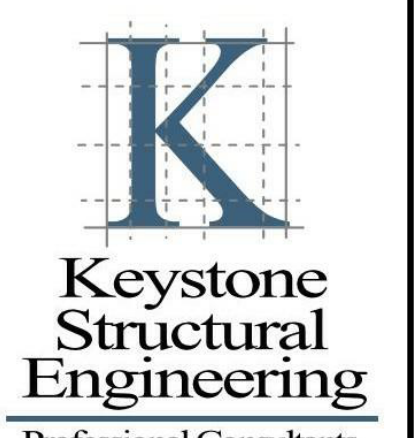

Professional Consultants
531 Roselane Street
Suite 150
Marietta, GA 30060
PRICING ONLY NOT FOR CONSTRUCTION

Rev. No.	Date	Name
1	Date 2	Revision 2


PROGRESS SET

PROJECT

Peach State Construction Company Office

ADDRESS
Unknown

CLIENT

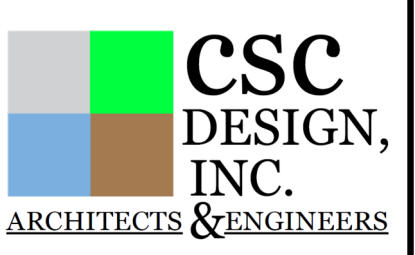

ADDRESS
135 P. Rickman Industrial Dr.
Suite 100, Canton, GA 30115

SHEET TITLE

PRICING ONLY NOT FOR CONSTRUCTION PLAN

Date: 02/09/2026

PROJECT NUMBER
26-114

SHEET NUMBER
S1.1

2/11/2026 1:55:54 PM
C:\Users\blm\OneDrive - Keystone Structural Engineering\Documents\2026\26-114\26-114-Foundation\26-114-Foundation.dwg

1 Foundation Plan
S1.1 3/16" = 1'-0"