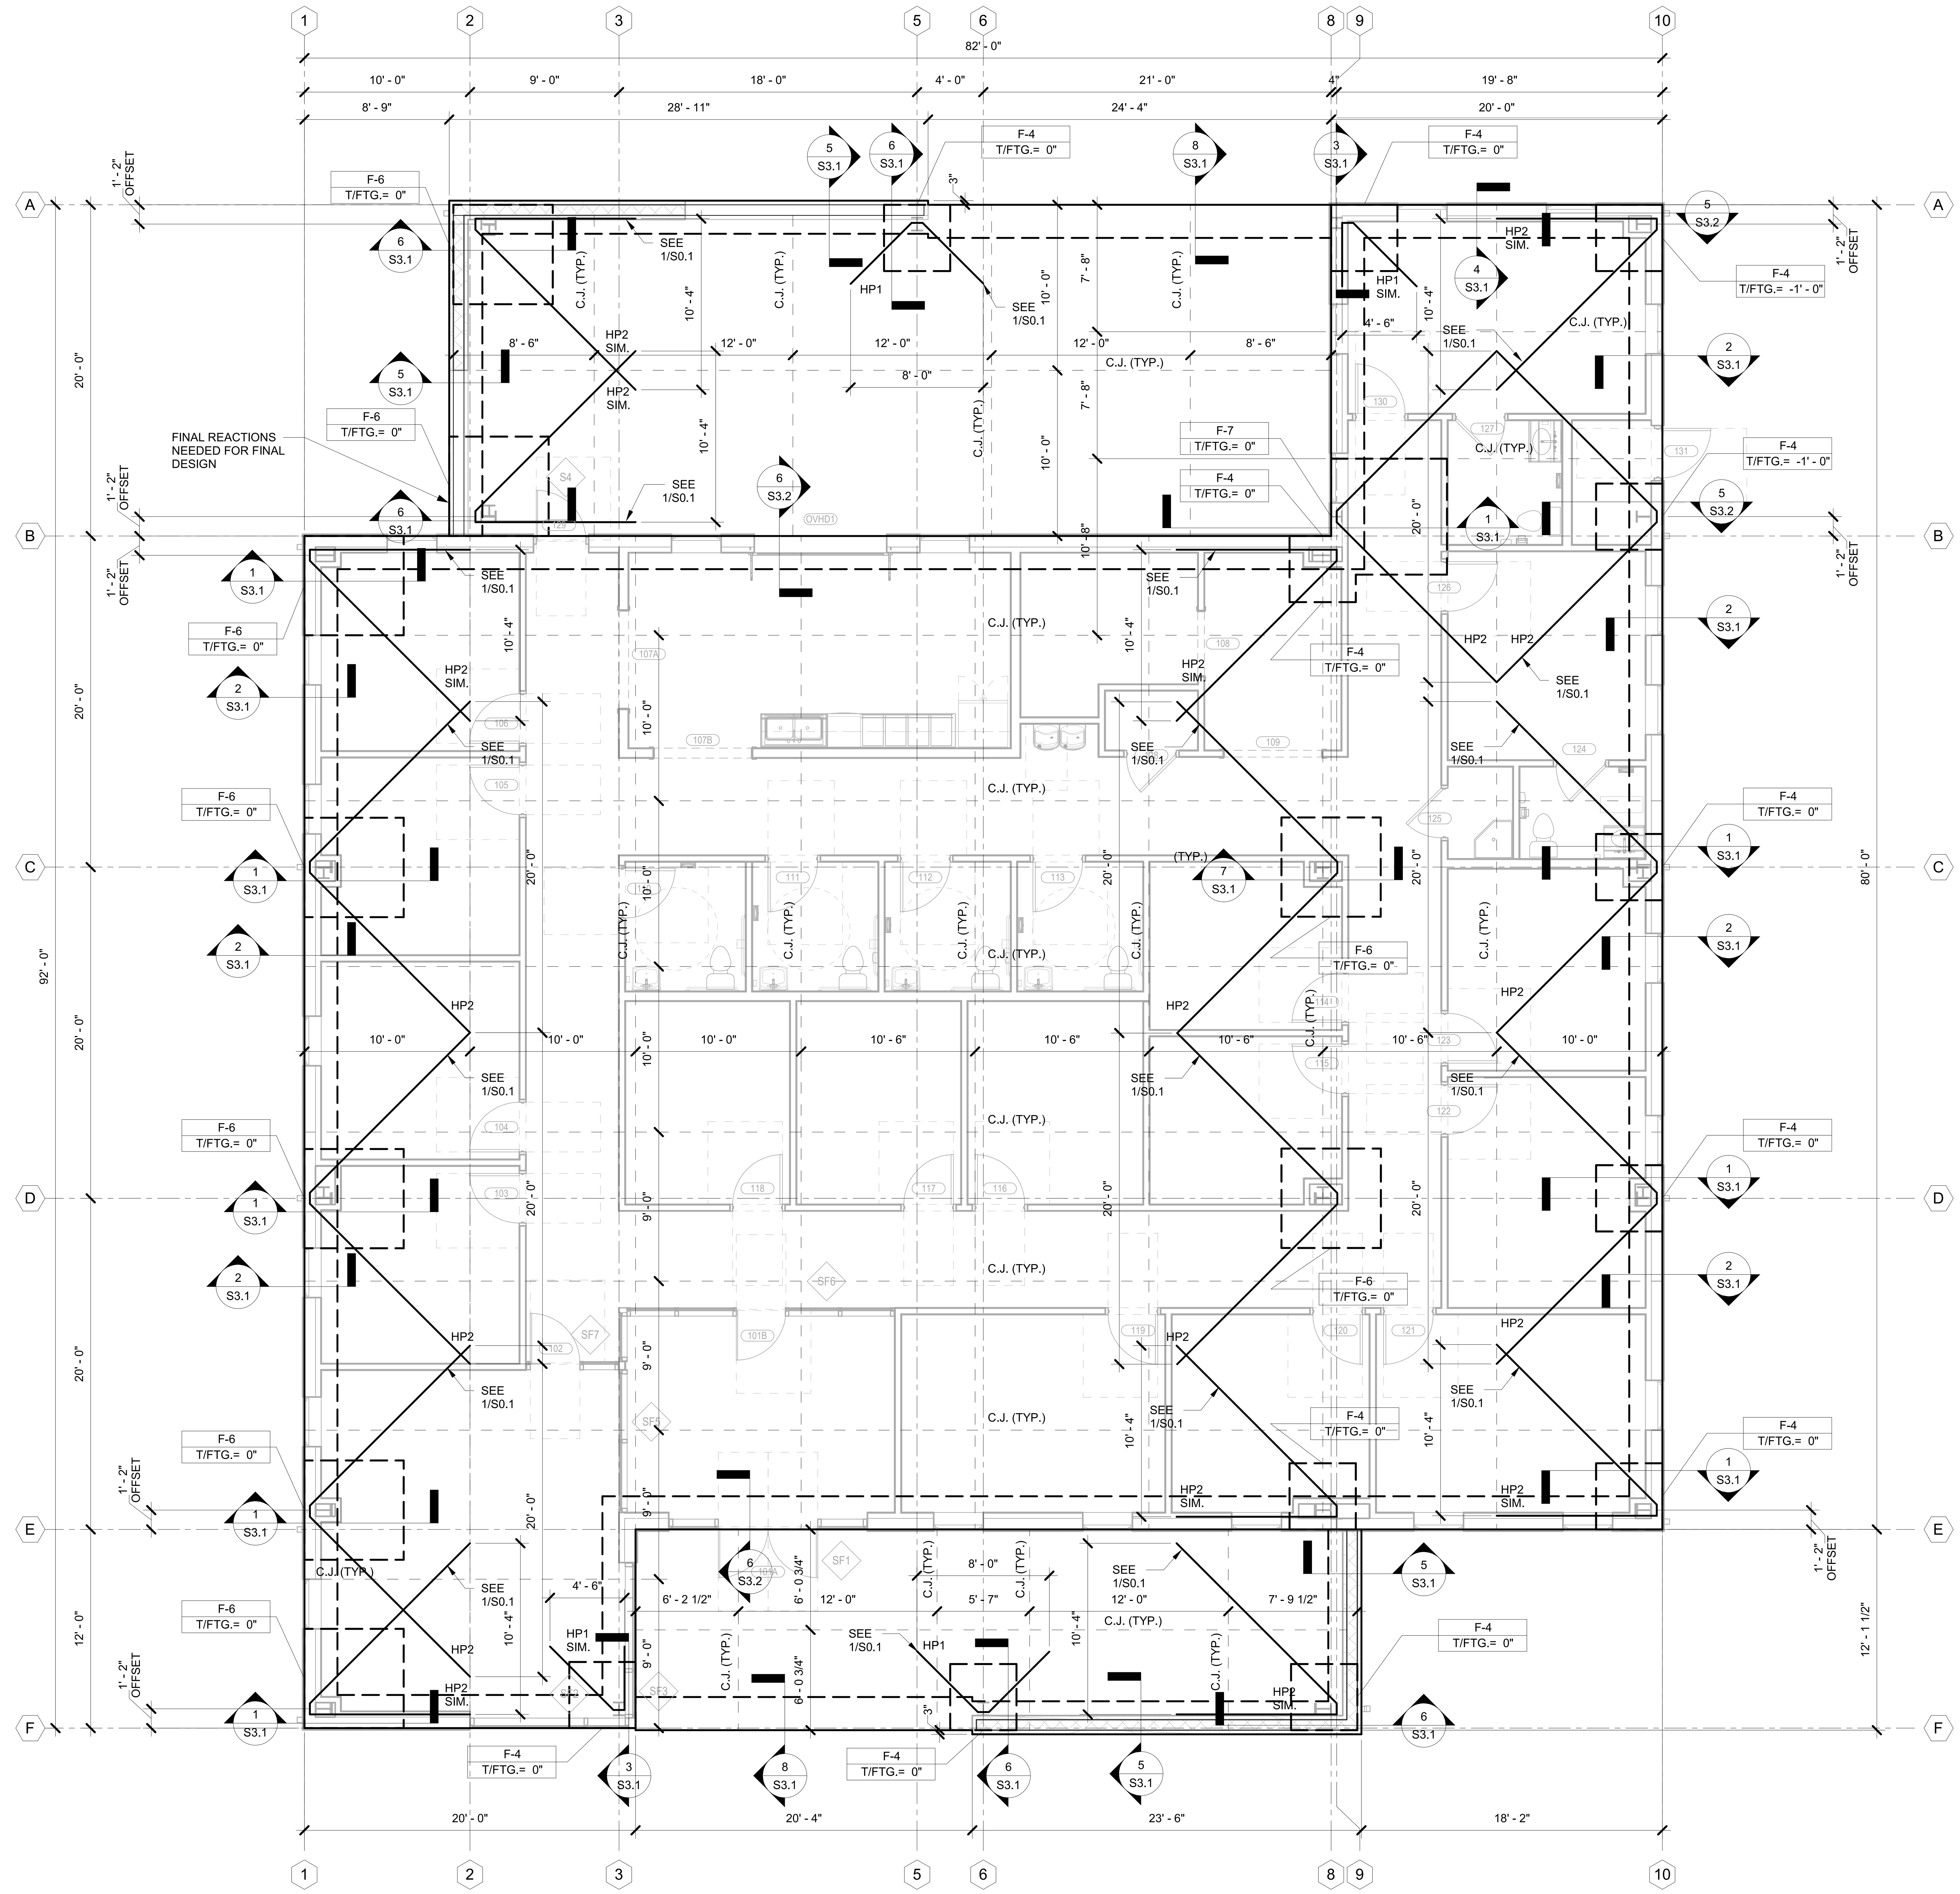

1 S1.1 Foundation Plan
3/16" = 1'-0"

HAIRPIN SCHEDULE	
MARK	HAIRPIN REINFORCING
HP1	#4 HAIRPIN
HP2	#6 HAIRPIN

PRE-ENGINEERED METAL BUILDING NOTES:

1. P.E.M.B. MANUFACTURER COORDINATED SUSPENDED MECHANICAL UNITS AND LOADS WITH MECHANICAL DRAWINGS

2.P.E.M.B. MANUFACTURER COORDINATE X BRACING AND/OR PORTAL FRAME COLUMN LOCATIONS WITH ARCHITECTURAL

3. FOUNDATIONS INDICATED ARE BASED ON PRELIMINARY LOADS AND LAYOUT. FINAL FOUNDATION LOCATION AND DETAILS WILL BE DETERMINED AFTER FINAL P.E.M.B. MANUFACTURER LOADS ARE SUBMITTED

FOUNDATION NOTES:

1. REFER TO ARCHITECTURAL DRAWINGS FOR INTERIOR WALL DIMENSIONS AND SLAB CONTROL JOINT LOCATIONS.

2. 4" THICK 3000 PSI CONCRETE SLAB REINFORCED w/ 6X6-W1.4/W1.4 WWR LOCATED MID-DEPTH OF SLAB. REFER TO GEOTECHNICAL ENGINEER FOR SLAB ON GRADE/SUBGRADE PREPARATION REQUIREMENTS. REFER TO ARCHITECTURAL FOR RECESSES AND CONTROL JOINT LOCATIONS.

3. ALL CONCRETE WORK SHALL CONFORM TO ACI 301 "SPECIFICATIONS FOR STRUCTURAL CONCRETE FOR BUILDINGS".

4. FINISH FLOOR ELEVATION: SEE CIVIL

Structural Foundation Schedule

Type Mark	*Footing Dimensions*	*Reinforcing*	*Remarks*
F-4	4'-0"x4'-0"x2'-0"	(4) - #5 EACH WAY	TOP AND BOTTOM
F-6	6'-0"x6'-0"x2'-0"	(6) - #5 EACH WAY	TOP AND BOTTOM
F-7	7'-0"x7'-0"x2'-0"	(7) - #5 EACH WAY	TOP AND BOTTOM

Keystone Structural Engineering
Professional Consultants
531 Roselane Street
Suite 150
Marietta, GA 30060
(404) 483 6921

GEORGIA REGISTERED No 30737 PROFESSIONAL ENGINEER BRENDAN F. CROWLEY

Rev. No.	Date	Name

ISSUED FOR CONSTRUCTION

PROJECT

Peach State Construction Company Office

ADDRESS

265 Piper Road
Covington, GA 30014

CLIENT

CSC DESIGN, INC. ARCHITECTS & ENGINEERS

ADDRESS

135 P. Rickman Industrial Dr.
Suite 100, Canton, GA 30115

SHEET TITLE

FOUNDATION PLAN

Date: 04/24/2026

PROJECT NUMBER 26-114

SHEET NUMBER S1.1

4/24/2026 5:02:58 PM
C:\Users\EMILY\OneDrive - Keystone Structural Engineering, P.C\Documents\26114 R24_crowleybrendan.rvt