

Architects & Engineers

project
**CHURCH
IN THE
NOW**

address
1873 4 1933
IRIS DRIVE
CONYERS, GA
for
COVENANT
SERVICES, INC
1771 WESLEY WAY
CONYERS, GA


sheet description
UPPER ROOF
FRAMING
PLAN

drawn MSM
checked JMW

job 01-145-B

date 08/15/02

S-111
of 16

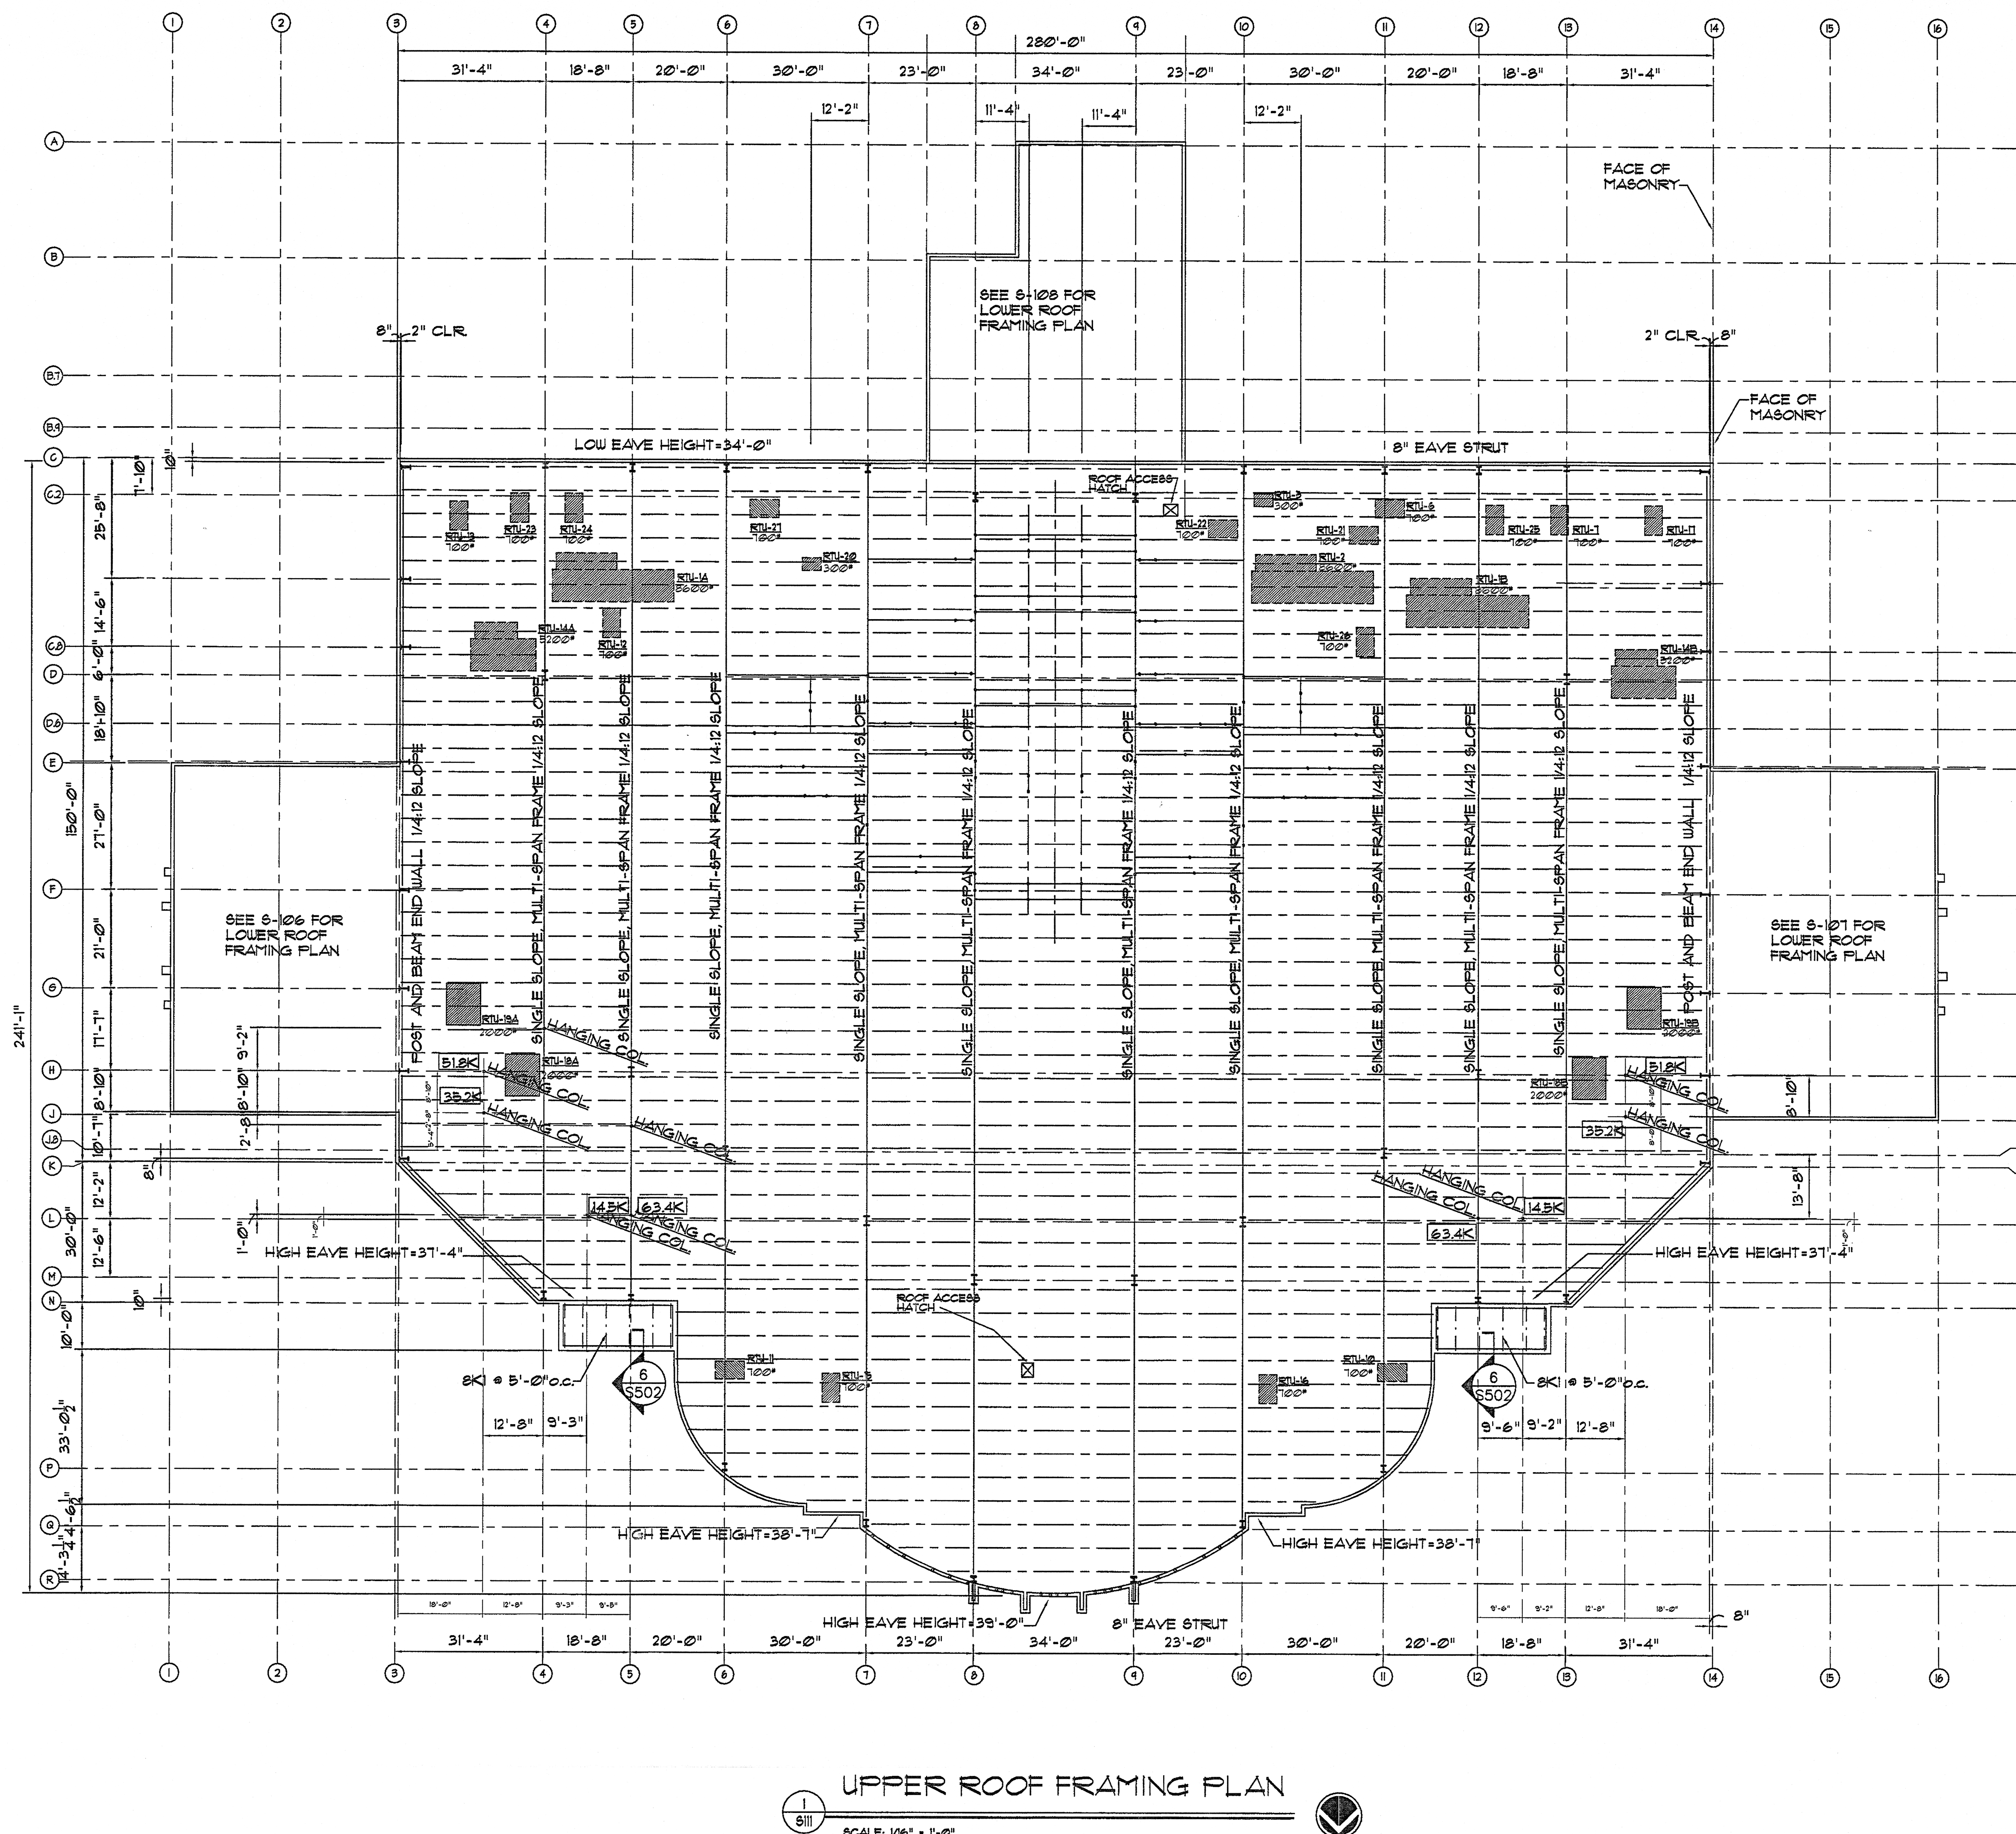

UPPER ROOF FRAMING PLAN



PLANNING

- NOTE: 1. PRE ENGINEERED BUILDING MANUFACTURER TO PROVIDE SUPPORT FOR ROOF TOP HVAC LOADS
2. PRE ENGINEERED BUILDING MANUFACTURER TO PROVIDE WIND FRAMES AND/OR BRACING FOR WIND AND SEISMIC.
3. ROOF LIVE LOAD TO BE 20 PSF, WITH A MINIMUM OF 16 PSF FOR LIVE LOAD REDUCTION.
4. ROOF LIVE LOAD DEFLECTION TO BE LIMITED TO L/240.
5. COLLATERAL LOAD TO BE 10 PSF.