CSC.2024.01.007

ABBREVIATION LEGEND

%	PERCENT
§	SECTION
A	
A/C	AIR CONDITIONER
A/E	ARCHITECT / ENGINEER
A/V	AUDIO VISUAL
AB	ANCHOR BOLT
ACC	ACCESSIBLE
ACI	AMERICAL CONCRETE INSTITUTE
ACT	ACOUSTICAL CEILING TILE
ADA	AMERICANS WITH DISSABILITIES ACT
ADJ	ADJACENT; ADJUSTABLE
ADMIN	ADMINISTRATION
AFF	ABOVE FLOOR FINISH
AFG	ABOVE FINISH GRADE
AHJ	AUTHORITY HAVING JURISTICTION
AHU	AIR HANDLING UNIT
AIA	AMERICAN INSTITUTE OF ARCHITECTS
AISC	AMERICAN INSTITUTE OF STEEL CONSTRUCTION
ALT	ALTERNATE; ALTERNATING
ALUM	ALUMINUM
ANOD	ANODIZED
ANSI	AMERICAN NATIONAL STANDARDS INSTITUTE
APPROX	APPROXIMATE
ARCH	ARCHITECT
AUTO	AUTOMATIC
AVG	AVERAGE
AWI	ARCHITECTURAL WOODWORKING INSTITUTE
B	
B.O.	BOTTOM OF
B.O.D.	BASIS OF DESIGN
BD	BOARD
BETW	BETWEEN
BEV	BEVELED
BIT	BITUMINOUS
BLDG	BUILDING
BLK	BLOCK
BLKG	BLOCKING
BR	BEDROOM; BRICK
BSMT	BASEMENT
BTM	BOTTOM
BTU	BRITISH THERMAL UNIT
BUR	BUILT UP ROOFING
BW	BOTH WAYS
C	
CCD	CONTRACT CHANGE DIRECTIVE
CD	CONSTRUCTION DOCUMENTS
CER	CERAMIC
CF	CONTRACTOR FURNISHED
CFC	CHLOROFLOUROCARBONS
CFM	CUBIC FEET PER MINUTE
CFS	CUBIC FEET PER SECOND
CI	CONTRACTOR INSTALLED
CIP	CAST IN PLACE
CJ	CONTROL JOINT
CL	CENTER LINE; CLASS
CLG	CEILING
CLO	CLOSET
CLR	CLEAR
CM	CONSTRUCTION MANAGEMENT
CMU	CONCRETE MASONRY UNIT
CO	CERTIFICATE OF OCCUPANCY; CLEANOUT
COL	COLUMN
CONC	CONCRETE
CONSTR	CONSTRUCTION
CONTR	CONTRACTOR
CORR	CORRIDOR
CPT	CARPET
CSI	CONSTRUCTION SPECIFICATION INSTITUTE
CT	CERAMIC TILE; COUNT
CTR	CENTER
CU	CUBIC
D	
D	DEEP; DEPTH
d	PENNY (NAIL)
DBL	DOUBLE
DEG	DEGREE
DEMO	DEMOLITION; DEMOLISH
DEPT	DEPARTMENT
DET	DETAIL
DF	DRINKING FOUNTAIN
DH	DOUBLE HUNG
DIA	DIAMETER
DIAG	DIAGONAL
DIFF	DIFFERENCE; DIFFUSER
DIM	DIMENSION
DISP	DISPENSER
DIST	DISTANCE
DL	DEAD LOAD
DN	DOWN
DR	DOOR; DOORS; DRAIN
DS	DOWNSPOUT
DTL	DETAIL
DW	DISHWASHER
DWG	DRAWING
DWR	DRAWER
E	
E	EAST
EA	EACH
EF	EACH FACE; EXHAUST FAN
EIFS	EXTERIOR INSULATION AND FINISH SYSTEM
EJ	EXPANSION JOINT
EL	ELEVATION
ELEC	ELECTRIC; ELECTRICAL
ELEV	ELEVATOR
EMERG	EMERGENCY
ENCL	ENCLOSURE
ENGR	ENGINEER
ENTR	ENTRANCE
EPA	ENVIRONMENTAL PROTECTION AGENCY
EQ	EQUAL
EST	ESTIMATE
EW	EACH WAY
EWC	ELECTRIC WATER COOLER
EXH	EXHAUST
EXP	EXPANSION; EXPOSED
EXT	EXTERIOR; EXTERNAL
F	
F.O.	FACE OF
FAR	FLOOR AREA RATING
FC	FOOT CANDLES
FCO	FLOOR CLEANOUT
FD	FLOOR DRAIN
FDN	FOUNDATION
FE	FIRE EXTINGUISHER
FF&E	FURNITURE, FIXTURES & EQUIPMENT
FFC	FIRE EXTINGUISHER CABINET
FHC	FIRE HOSE CABINET
FIG	FIGURE
FIN	FINISH
FIXT	FIXTURE
FLEX	FLEXIBLE
FLG	FLOORING
FLOUR	FLOURESCENT
FLR	FLOOR
FOM	FACE OF MASONRY
FOS	FACE OF STUD
FP	FIRE PROTECTIONS
FPL	FABRIC PANEL
FR	FIRE RATING; FIRE RESISTANT; FRAME
FRTWD	FIRE RETARDENT TREATED WOOD
FT	FEET (FOOT)
FTG	FOOTING
FURR	FURRING
FWC	FABRIC WALL COVERTING
G	
GA	GAGE
GALV	GALVANIZED
GC	GENERAL CONTRACTOR
GEN	GENERAL
GENR	GENERATOR
GFI	GROUND FAULT INTERRUPTER
GL	GLASS
GLZ	GLAZING
GRD	GROUND
GSB	GYPSUM SHEATHING BOARD
GWB	GYPSUM WALL BOARD
GYP	GYPSUM
H	
H	HIGH
HB	HOSE BIBB
HC	HANDICAP-HOLLOW CORE
HDR	HEADER
HDW	HARDWARE
HEX	HEXAGONAL
HID	HIGH INTENSITY DISCHARGE
HM	HOLLOW METAL
HR	HOUR
HT	HEIGHT
HTG	HEATING
HTR	HEATER
HVAC	HEATING, VENTILATING AND AIR CONDITIONING
HW	HOT WATER
HW	HOT WATER
HWY	HIGHWAY
I	
IAQ	INDOOR AIR QUALITY
IBC	INTERNATIONAL BUILDING CODE
IC	IN CONTRACT
ID	IDENTIFICATION; INTERIOR DESIGN; INSIDE DIAMETER
IN	INCHES
INCAND	INCANDESCENT
INCL	INCLUSIVE
INCLDG	INCLUDING
INFO	INFORMATION
INSUL	INSULATION
INT	INTERIOR
INV	INVERT
J	
JAN	JANITOR
JB	JUNCTION BOX
JST	JOIST
JT	JOINT
K	
KD	KNOCK DOWN
KIP	THOUSAND POUNDS
KIT	KITCHEN
KWY	KEYWAY
L	
L	ANGLE; LENGTH; LOW
LAB	LABORATORY
LAM	LAMINATE; LAMINATED
LAV	LAVATORY
LB	POUND
LBS	POUNDS
LDG	LANDING
LED	LIGHT EMITTING DIODE
LF	LINEAR FOOT; LINEAR FEET
LH	LEFT HAND
LHR	LEFT HAND REVERSE
LIB	LIBRARY
LIN	LINEAR
LL	LIVE LOAD
LONG	LONGITUDINAL
LR	LIVING ROOM
LT	LIGHT
LTG	LIGHTING
LVL	LAMINATED VENEER LUMBER; LEVEL
M	
m	METER
M HAL	METAL HALIDE
MAINT	MAINTENANCE
MAS	MASONRY
MATL	MATERIAL
MAX	MAXIMUM
MBR	MEMBER
MECH	MECHANICAL
MED	MEDIUM
MEZZ	MEZZANINE
MFR	MANUFACTURER
MIN	MINIMUM; MINUTE
MISC	MISCELANIOUS
MO	MASONRY OPENING
MT	MOUNT
MTG	MOUNTING
MTL	METAL
MW	MICROWAVE
MWP	METAL WALL PANEL
N	
N	NORTH
N/A	NOT APPLICABLE
NE	NORTH EAST
NEC	NATIONAL ELECTRIC CODE
NEG	NEGATIVE
NFPA	NATIONAL FIRE PROTECTION ASSOCIATION
NIC	NOT IN CONTRACT
NO	NUMBER
NOM	NOMINAL
NRC	NOISE REDUCTION COEFFICIENT
NSF	NET SQUARE FOOT; NET SQUARE FOOT
NTS	NOT TO SCALE
NW	NORTHWEST
O	
OC	ON CENTER
OCC	OCCUPANCY; OCCUPIED
OD	OUTSIDE DIAMETER
OFF	OFFICE
OH	OVERHEAD
OPG	OPENING
OPP	OPPOSITE
OZ	OUNCE; OUNCES
P	
PART	PARTIAL
PASS	PASSAGE
PC	PRECAST
PCC	PRECAST CONCRETE
PD	PEDISTAL
PERF	PERFORATED
PERP	PERPENDICULAR
PL	PLATE; PROPERTY LINE
PLAM	PLASTIC LAMINATE
PLAS	PLASTIC
PLB	PLUMB
PLBG	PLUMBING
PLF	POUNDS PER LINEAR FOOT
PLYWD	PLYWOOD
PNL	PANEL
POS	POSITIVE
PR	PAIR
PREFAB	PREFABRICATED
PROJ	PROJECT; PROJECTED
PROP	PROPERTY; PROPOSAL
PSF	POUNDS PER SQUARE FOOT
PSI	POUNDS PER SQUARE INCH
PT	PAINT; PRESSURE TREATED
PTD	PAINTED
PTN	PARTITION
Q	
QT	QUARRY TILE
QTY	QUANTITY
R	
R	MEASURE OF THERMAL RESISTANCE; RADIUS; RISER
RB	RESILIENT BASE; RUBBER BASE
RBR	RUBBER
RC	REINFORCED CONCRETE
RCP	REFLECTED CEILING PLAN
RD	ROAD; ROOF DRAIN
REBAR	REINFORCING STEEL BARS
REC	RECESSED
RECEPT	RECEPTICAL
RECT	RECTANGLE
REF	REFERENCE; REFRIGERATOR
REINF	REINFORCE; REINFORCING; REINFORCEMENT
REQ	REQUIRE; REQUIRED
RET	RETURN
REV	REVISE; REVISED; REVISION
RFG	ROOFING
RFI	REQUEST FOR INFORMATION
RH	RIGHT HAND
RHR	RIGHT HAND REVERSE
RM	ROOM
RO	ROUGH OPENING
ROW	RIGHT OF WAY
RPM	ROTATIONS PER MINUTE
RSF	RENTABLE SQUARE FEET
RT	RUBBER TILE
RTG	RATING
RTU	ROOFTOP UNIT
RWC	RAIN WATER CONDUCTOR
S	
S	SOUTH
SAN	SANITARY
SB	STONE BASE
SC	SOLID CORE
SCH	SCHEDULE; SCHEDULED
SCHEM	SCHEMATIC
SD	SMOKE DETECTOR; STORM DRAIN
SDG	SIDING
SE	SOUTH EAST
SECT	SECTION
SF	SQARE FOOT; SQUARE FEET
SGL	SINGLE
SHT	SHEET
SHWR	SHOWER
SIM	SIMILAR
SPEC	SPECIFICATION
SPKR	SPEAKER
SQ	SQUARE
SST	STAINLESS STEEL
ST	STAIRS; STREET; STAIN
STC	SOUND TRANSMISSION COEFFICIENT
STD	STANDARD
STL	STEEL
STN	STONE
STO	STORAGE
STR	STRUCTURE; STRUCTURAL
SUSP	SUSPENDED
SW	SOUTH WEST
SWR	SEWER
SYMB	SYMBOL
SYS	SYSTEM
T	
T	TILE; TREAD; TREADS
T&B	TOP AND BOTTOM
T&G	TONGUE AND GROOVE
T.O.	TOP OF
TB	TILE BASE
TBD	TO BE DETERMINED
TEL	TELEPHONE
TEMP	TEMPERATURE; TEMPORARY
TERR	TERRAZZO
THK	THICK; THICKENED; THICKNESS
THRES	THRESHOLD
THRU	THROUGH
TMPD	TEMPERED
TOC	TOP OF CONCRETE; TOP OF CURB
TOPO	TOPOGRAPH; TOPOGRAPHY; TOPOGRAPHIC
TOS	TOP OF STEEL
TOW	TOP OF WALL
TRANSF	TRANSFORMER
TSTAT	THERMOSTAT
TV	TELEVISION
TYP	TYPICAL
U	
U	HEAT TRANSFER COEFFICIENT
UC	UNDERCUT
UH	UNIT HEATER
UL	UNDERWRITERS LABORATORIES INC.
UNEXCAV	UNEXCAVATED
UNO	UNLESS NOTED OTHERWISE
UPS	UNITERRUPTABLE POWER SUPPLY
UR	URINAL
USF	USABLE SQUARE FOOTAGE
USG	UNITED STATES GYPSUM CORPORATION
UTIL	UTILITY
V	
V	VENT; VOLT
V.I.F.	VERIFY IN FIELD
VAR	VARIES
VAV	VARIABLE AIR VOLUME
VB	VINYL BASE
VCT	VINYL COMPOSITION TILE
VENT	VENTILATION
VERT	VERTICAL
VEST	VESTIBULE
VOC	VOLATILE ORGANIC COMPOUND
VOL	VOLUME
VTR	VENT THROUGH ROOF
VWC	VINYL WALL COVERING
W	
W	WATT; WEST; WIDE; WIDTH
W/	WITH
W/D	WASHER / DRYER
W/O	WITHOUT
WB	WOOD BASE
WC	WATER CLOSET; TOILET
WCO	WALL CLEANOUT
WD	WOOD
WDW	WINDOW
WF	WIDE FLANGE
WH	WATER HEATER
WL	WIND LOAD
WLD	WELDED
WP	WATERPROOF; WATERPROOFING; WEATHERPROOF
WPT	WORKING POINT
WT	WEIGHT
WWF	WELDED WIRE FABRIC
X	
XPS	EXTRUDED POLYSYRENE BOARD (INSULATION)
Y	
YD	YARD; YARD DRAIN

SECTION/PLAN LEGEND

- ALUMINUM
- BATT INSULATION
- BRICK
- CONCRETE
- CONCRETE MASONRY
- EARTH
- GRAVEL / DGA
- PLASTER, GYPSUM WALL BOARD
- PLYWOOD
- RIGID INSULATION
- SAND
- SPRAY FOAM INSULATION
- STEEL, IRON
- STONE
- WOOD BLOCKING / SHIM
- WOOD DIMENSIONAL
- WOOD FINISH

SYMBOLS LEGEND

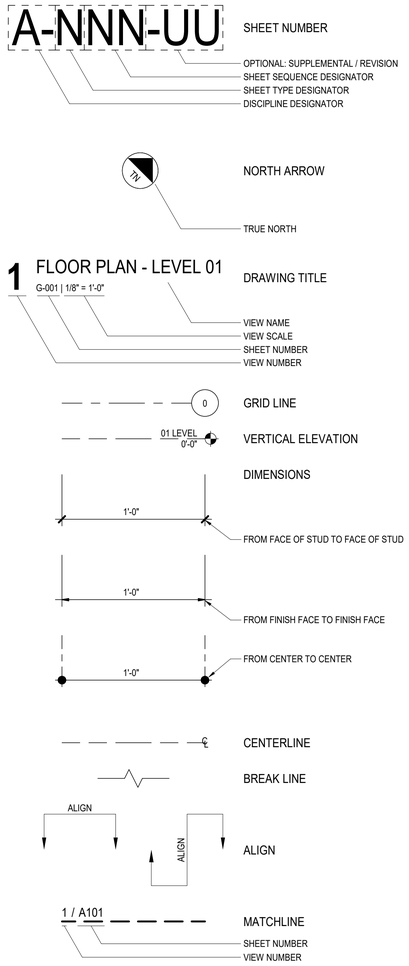

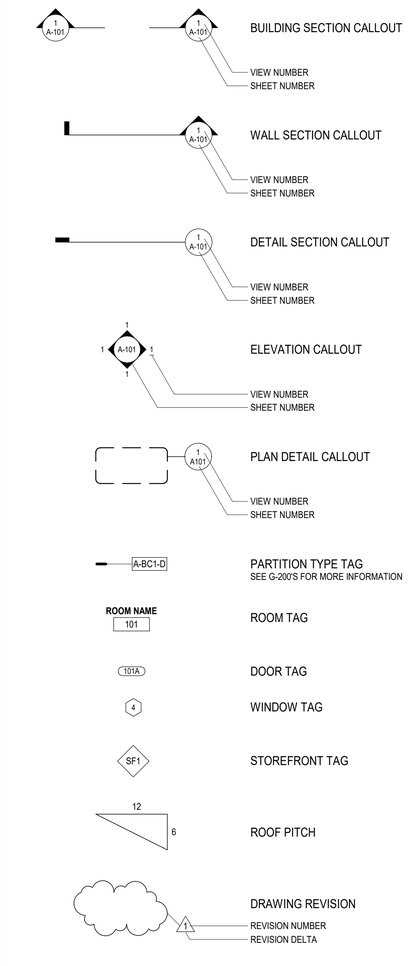

CSC DESIGN, INC.
ARCHITECTS & ENGINEERS
135 P RICKMAN INDUSTRIAL DR.
SUITE 100 CANTON, GA 30115
Phone: (770) 345-2579

© 2025, CSC Design. These drawings are protected by the copyright laws of the United States. These drawings or any part thereof may not be used for any purpose or reproduced in any form or by any means without the written consent of CSC Design.

PRICING ONLY NOT FOR CONSTRUCTION

PROJECT NUMBER: 25-038

REVISIONS
NO. DATE: ISSUE:

PEACH STATE CONSTRUCTION COMPANY OFFICE

265 PIPER ROAD
COVINGTON, GA 30014
NEWTON COUNTY, GEORGIA

PRICING ONLY NOT FOR CONSTRUCTION

SYMBOLS & LEGENDS

G-005

PRICING ONLY

Y:\Projects\25-038 Peach State Construction Office_Covington, GA\Archi\00 REVIT\25-038 Peach State Construction Office.rvt

2/26/2026 4:09:56 PM